



Adjustable thresholds

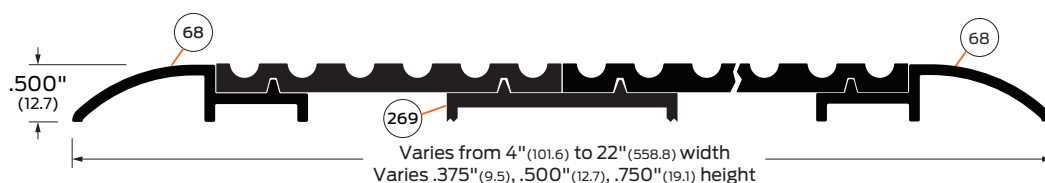

672




Finishes: A, BK, D, G
Options: E, EL



ANSI/BHMA:
672A, 672D, 672G, 672BK
672A-E, 672D-E, 672G-E, 672BK-E

J37100, J37136
J37200, J37236

Supplied without mounting holes.



673



Finishes: A, BK, D, G
B, B-ORB
Options: E, EL,
(not available
for B-ORB finish)



ANSI/BHMA:
673A, 673D, 673G, 673BK
673A-E, 673D-E, 673G-E, 673BK-E
673B
673B-E

J37100, J37136
J37200, J37236
J17100, J17136
J17200, J17236


Supplied without mounting holes.

Installation note:

ZERO adjustable thresholds systems can be installed easily and quickly without welding or screws on the base. Screws are required only to secure the top plate.

For thresholds with vertical wraparounds (# 105, #106, #107), screws are recommended in both directions for firm attachment at anchor points.

674



Finishes: A, BK, D, G
B, B-ORB
Options: E, EL,
(not available
for B-ORB finish)



ANSI/BHMA:
674A, 674D, 674G, 674BK
674A-E, 674D-E, 674G-E, 674BK-E
674B
673B-E

J37100, J37136
J37200, J37236
J17100, J17136
J17200, J17236

Supplied without mounting holes.

675



Finishes: A, BK, D, G
Options: E, EL




ANSI/BHMA:
675A, 675D, 675G, 675BK
675A-E, 675D-E, 675G-E, 675BK-E

J37100, J37136
J37200, J37236

Supplied without mounting holes.

676



Finishes: A, BK, D, G
B, B-ORB
Options: E, EL,
(not available
for B-ORB finish)



ANSI/BHMA:
676A, 676D, 676G, 676BK
676A-E, 676D-E, 676G-E, 676BK-E
676B
676B-E

J37100, J37136
J37200, J37236
J17100, J17136
J17200, J17236

Supplied without mounting holes.

See Thresholds Accessories & options page for details.

Finishes:

A Aluminum mill finish
BK Aluminum black anodized
D Aluminum dark bronze anodized
G Aluminum gold anodized
B Bronze, architectural mill finish
B-ORB Oil-rubbed bronze

Options:

E Epoxy abrasive tread
EL Photoluminescent and abrasive epoxy tread
V3 Full body strength fill
EV3 Epoxy and full body strength fill
ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill


Note:

Special anchors available for mounting most thresholds on concrete surfaces.
Suitable for use as recessed expansion joint floor plate for ADA openings.

Thresholds

Adjustable thresholds


678



Finishes: A, BK, D, G **Options:** E, EL **ANSI/BHMA:** 678A, 678D, 678G, 678BK J37100, J37136
678A-E, 678D-E, 678G-E, 678BK-E J37200, J37236

Supplied without mounting holes.


6710



Finishes: A, BK, D, G **Options:** E, EL **ANSI/BHMA:** 6710A, 6710D, 6710G, 6710BK J37136
6710A-E, 6710D-E, 6710G-E, 6710BK-E J37236

Supplied without mounting holes.


105

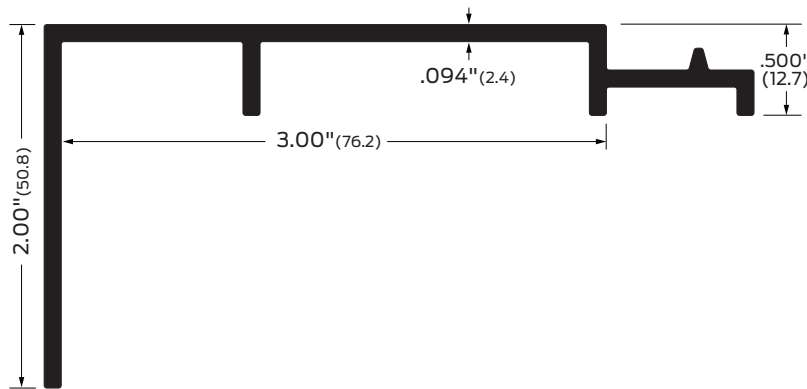

Finishes: A, BK, D, G **Options:** E, EL, V3 **ANSI/BHMA:** 105A, 105D, 105G, 105BK J37360, J37368

Supplied without mounting holes.


106

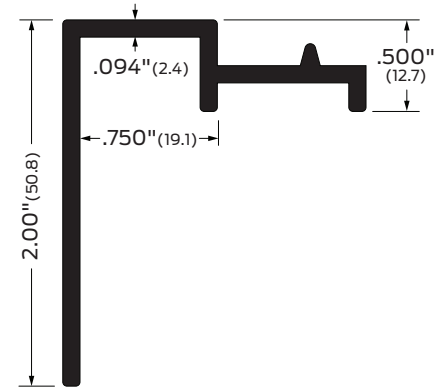

Finishes: A, BK, D, G **Options:** E, EL, V3 **ANSI/BHMA:** 106A, 106BK, 106D, 106G J37360, J37368

Supplied without mounting holes.


107

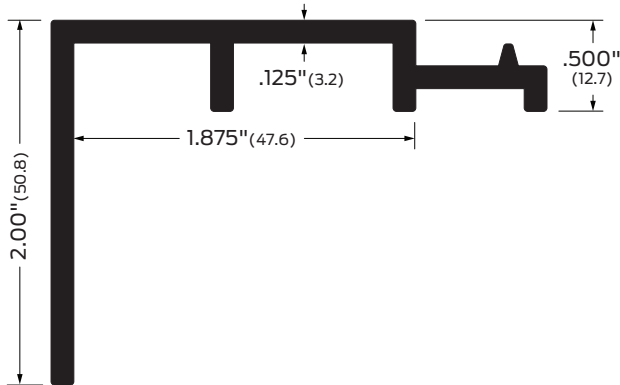

Finishes: B, B-ORB **Options:** E, EL, V3 **ANSI/BHMA:** 107B J17360, J17368

Supplied without mounting holes.


269

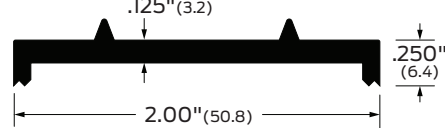

Finishes: A **ANSI/BHMA:** 269A J37360, J37336

Connection plate

469



Finishes: A **ANSI/BHMA:** 469A J37360, J37336

Connection plate

See Thresholds Accessories & options page for details.

Finishes:

A Aluminum mill finish
BK Aluminum black anodized
D Aluminum dark bronze anodized
G Aluminum gold anodized
B Bronze, architectural mill finish
B-ORB Oil-rubbed bronze

Options:


E Epoxy abrasive tread
EL Photoluminescent and abrasive epoxy tread
V3 Full body strength fill
EV3 Epoxy and full body strength fill
ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill

Note:

Special anchors available for mounting most thresholds on concrete surfaces.
Suitable for use as recessed expansion joint floor plate for ADA openings.


Adjustable thresholds

Series 671

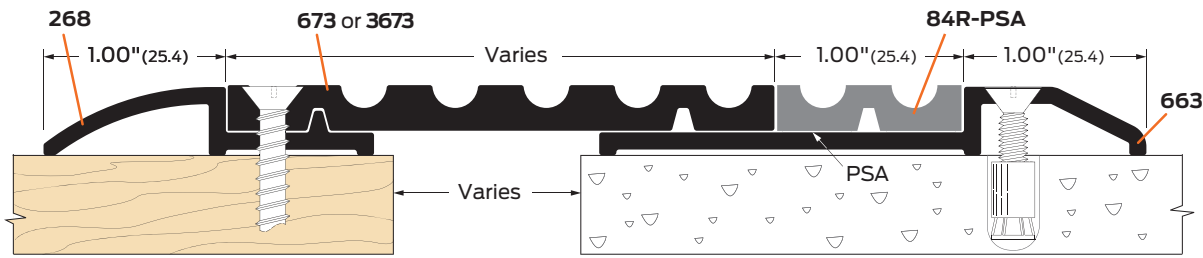

Order components separately.
Floor cover for 1" expansion joints, surface.
Ideal for use as transition threshold for free-floating wood gymnasium floors. Requires a 1/8" gap between metal and rubber components to prevent damage to rubber from expansion pressures.

84R-PSA



Finishes:
Gray


268



Finishes: A, BK, D, G B, B-ORB
BHMA CERTIFIED
ANSI/BHMA: 268A, 268BK, 268D, 268G 268B
J37360, J37336 J17360, J17336

Threshold rest. Supplied without mounting holes.


68

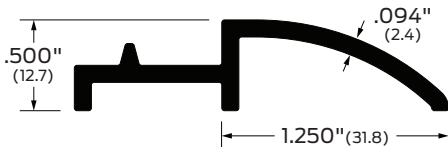

Finishes: A, BK, D, G B, B-ORB
BHMA CERTIFIED
ANSI/BHMA: 68A, 68BK, 68D, 68G 68B
J37360, J37336 J17360, J17336

Threshold rest. Supplied without mounting holes.

168

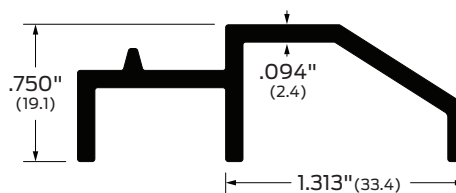

Finishes: A, BK, D, G B, B-ORB
BHMA CERTIFIED
ANSI/BHMA: 168A, 168BK, 168D, 168G 168B
J37360 J17360

Threshold rest. Supplied without mounting holes.

69



Finishes: A
BHMA CERTIFIED
ANSI/BHMA: 69A J32110, J37300

Threshold prep/shim. Supplied without mounting holes.

48



Finishes: A
BHMA CERTIFIED
ANSI/BHMA: 48A J37300

Threshold prep/ shim. Supplied without mounting holes.

49



Finishes: A
BHMA CERTIFIED
ANSI/BHMA: 49A J37300

Threshold prep/ shim. Supplied without mounting holes.

See Thresholds Accessories & options page for details.

Finishes:

- A Aluminum mill finish
- BK Aluminum black anodized
- D Aluminum dark bronze anodized
- G Aluminum gold anodized
- B Bronze, architectural mill finish
- B-ORB Oil-rubbed bronze

Options:

- E Epoxy abrasive tread
- EL Photoluminescent and abrasive epoxy tread
- V3 Full body strength fill
- EV3 Epoxy and full body strength fill
- ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill

Note:

Special anchors available for mounting most thresholds on concrete surfaces.