

FIRE RATING



UL listed



10B Classified up to 90 minutes




10C Classified

SMOKE PERFORMANCE



The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

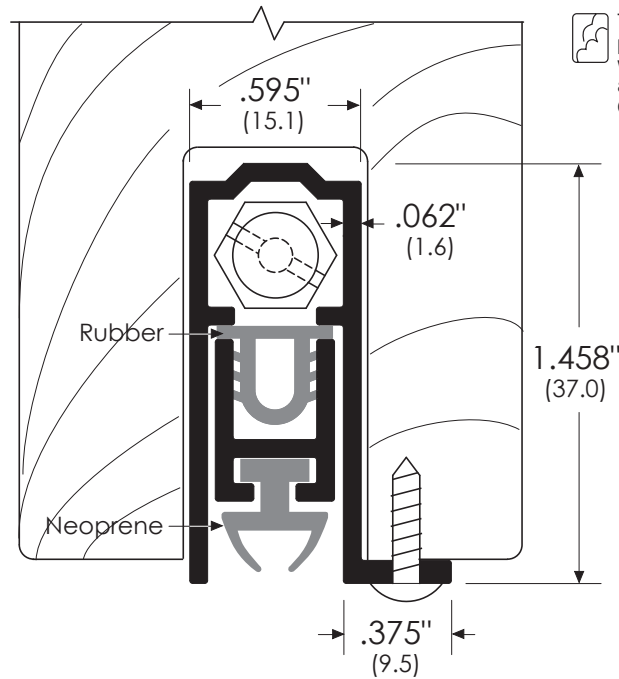

Legend:

A = Aluminum

ANSI/BHMA

#323A

R3B324



415 Concord Avenue
Bronx, NY 10455

tel: 718.585.3230
fax: 718.292.2243

email: zero@zerointernational.com
web site: www.zerointernational.com

Part No:

323

Notes:

Part Description:

Automatic Door Bottom

- Mortised
- Handed (L.H. shown)

Provided By:

Customer Name:

Job No:

Date: