

FIRE RATING



UL listed



ITS Warnock Hersey listed




10C Classified

SMOKE PERFORMANCE



The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

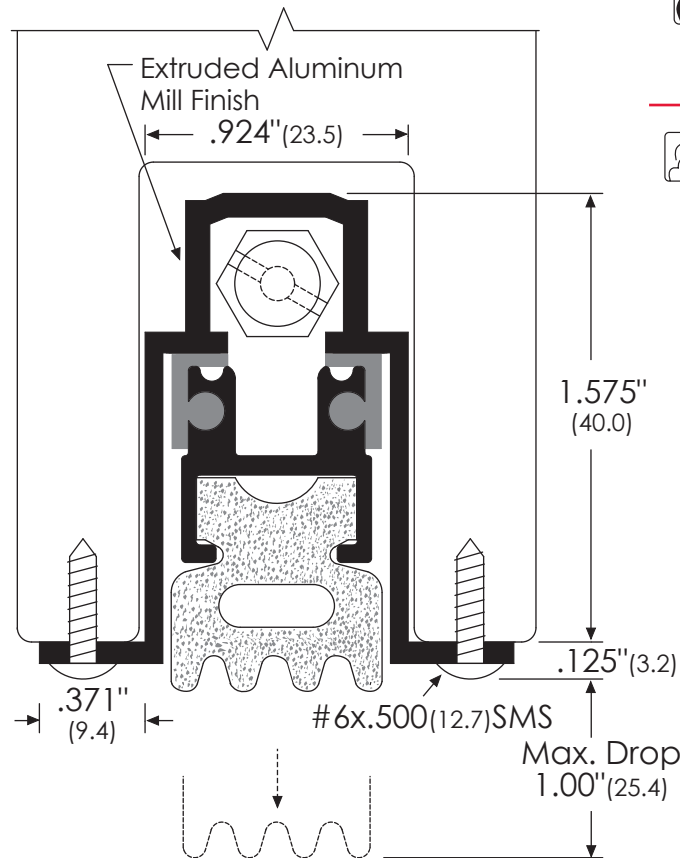

Legend:

A = Aluminum

ANSI/BHMA

#360A

R3C324



415 Concord Avenue
 Bronx, NY 10455

tel: 718.585.3230
 fax: 718.292.2243

email: zero@zerointernational.com
 web site: www.zerointernational.com

Part No:

360

Notes:

Part Description:

Automatic Door Bottom
 - Mortised / Heavy Duty

Provided By:

Customer Name:

Job No:

Date: