

FIRE RATING



UL listed



ITS Warnock Hersey listed




10C Classified

SMOKE PERFORMANCE



The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

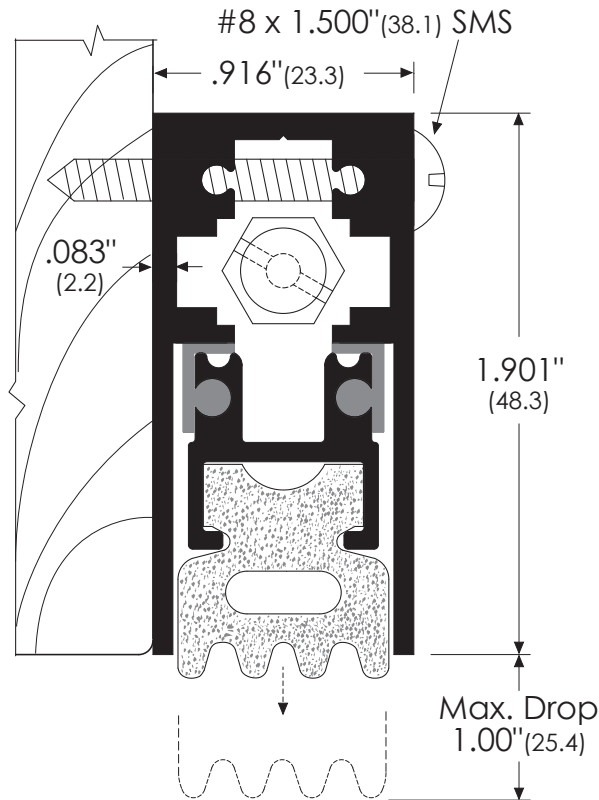

Legend:

AA = Clear Anodized
D = Dark Bronze Anodized
G = Gold Anodized

ANSI/BHMA

#361AA / 361D / 361G

R3C334



415 Concord Avenue
Bronx, NY 10455

tel: 718.585.3230
fax: 718.292.2243

email: zero@zerointernational.com
web site: www.zerointernational.com

Notes:

Part No:

361

Part Description:

Automatic Door Bottom

- Surface Mounted / Heavy Duty

Provided By:

Customer Name:

Job No:

Date: