

FIRE RATING



UL listed



ITS Warnock Hersey listed




10C Classified

SMOKE PERFORMANCE



The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

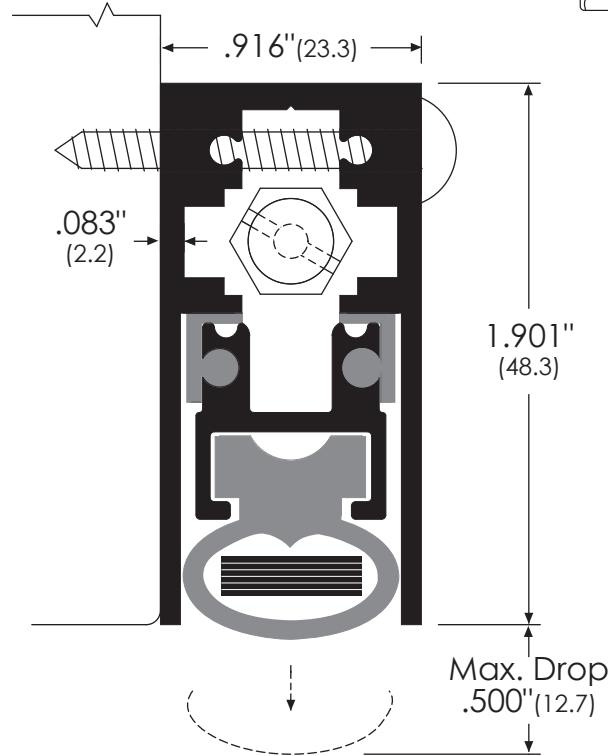

Legend:

AA = Clear Anodized
D = Dark Bronze Anodized
G = Gold Anodized
FS = Intumet™

ANSI/BHMA

#367FSAA / 367FSD / 367FSG

R3R334

	415 Concord Avenue Bronx, NY 10455 tel: 718.585.3230 fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com		Part No: 365FS	
	Notes:		Part Description: Intumescent Automatic Door Bottom - Surface Mounted	
Provided By:	Customer Name:	Job No:	Date:	