


FIRE RATING

 UL listed

 10C Classified

SMOKE PERFORMANCE

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

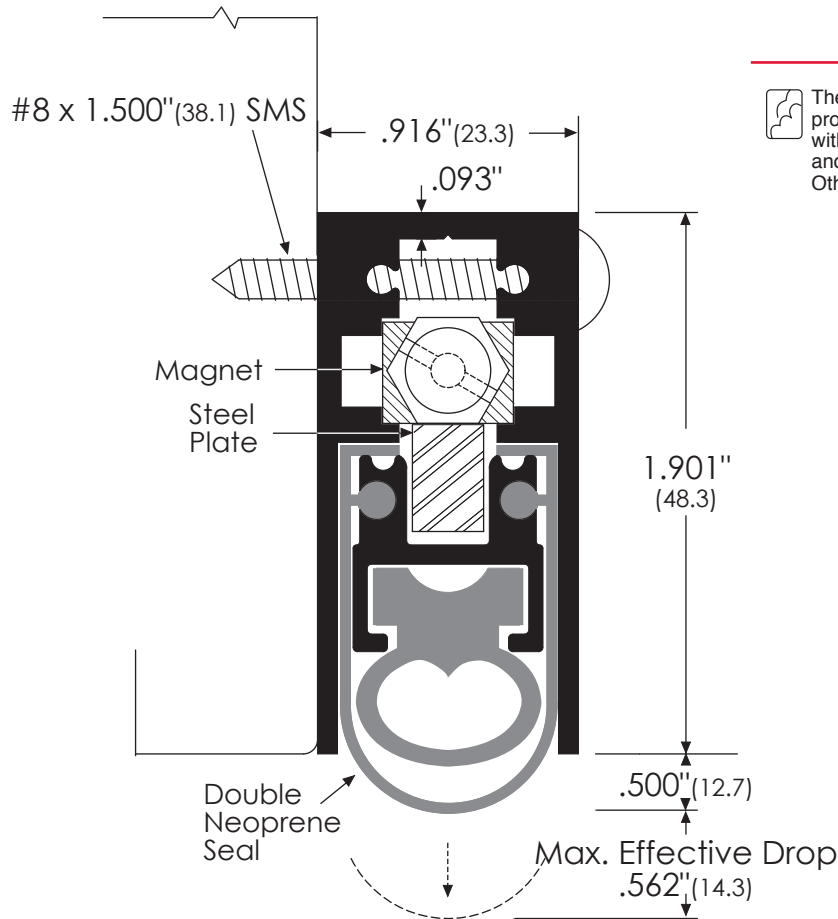

Legend:

AA = Clear Anodized
D = Dark Bronze Anodized
G = Gold Anodized

ANSI/BHMA

#367AA / 367D / 367G

R3B334



415 Concord Avenue tel: 718.585.3230
Bronx, NY 10455 fax: 718.292.2243
email: zero@zerointernational.com
web site: www.zerointernational.com

Part No:

367

Notes:

Part Description:

Automatic Door Bottom

- High Sound
- Surface Mounted / Heavy Duty

Provided By:

Customer Name:

Job No:

Date: