

FIRE RATING



UL listed




10C Classified

SMOKE PERFORMANCE



The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

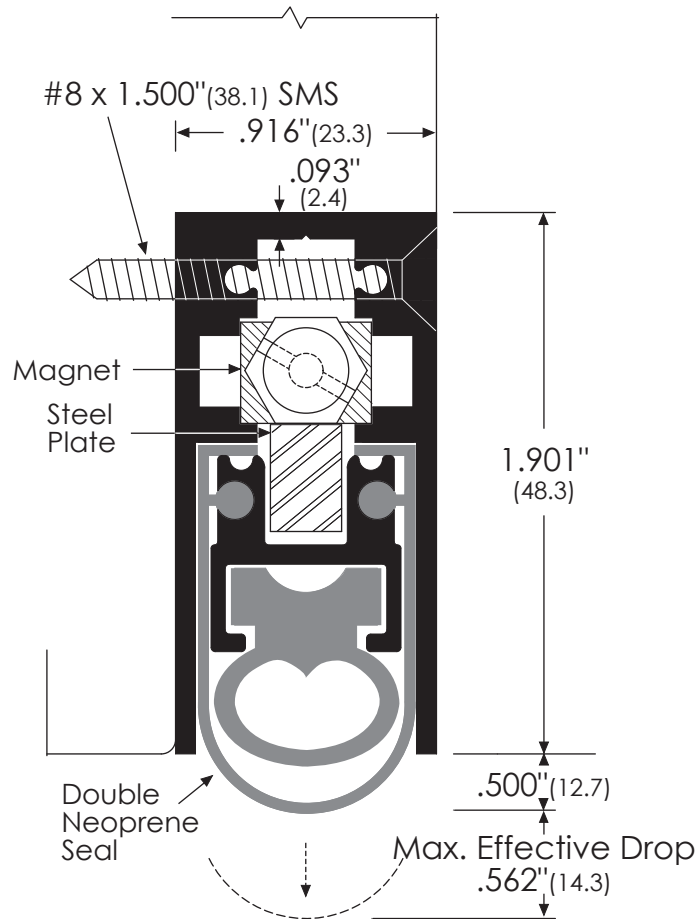

Legend:

AA = Clear Anodized
D = Dark Bronze Anodized
G = Gold Anodized

ANSI/BHMA

#368AA / 368D / 368G

R3B344



415 Concord Avenue tel: 718.585.3230
Bronx, NY 10455 fax: 718.292.2243
email: zero@zerointernational.com
web site: www.zerointernational.com

Part No:

368

Notes:

Part Description:

Automatic Door Bottom

- High Sound
- Semi-Mortised/Heavy Duty

Provided By:

Customer Name:

Job No:

Date: