


Still Protection Automatic Door Bottom



Note: AA = Clear Anodized
Z = Zinc

All ZERO automatic door bottoms function the same way. The mechanism causes the insert seal to activate on the hinge side first. It prevents the seal from dragging along the floor or threshold while the door is being closed to avoid door hang-up or closing delay.

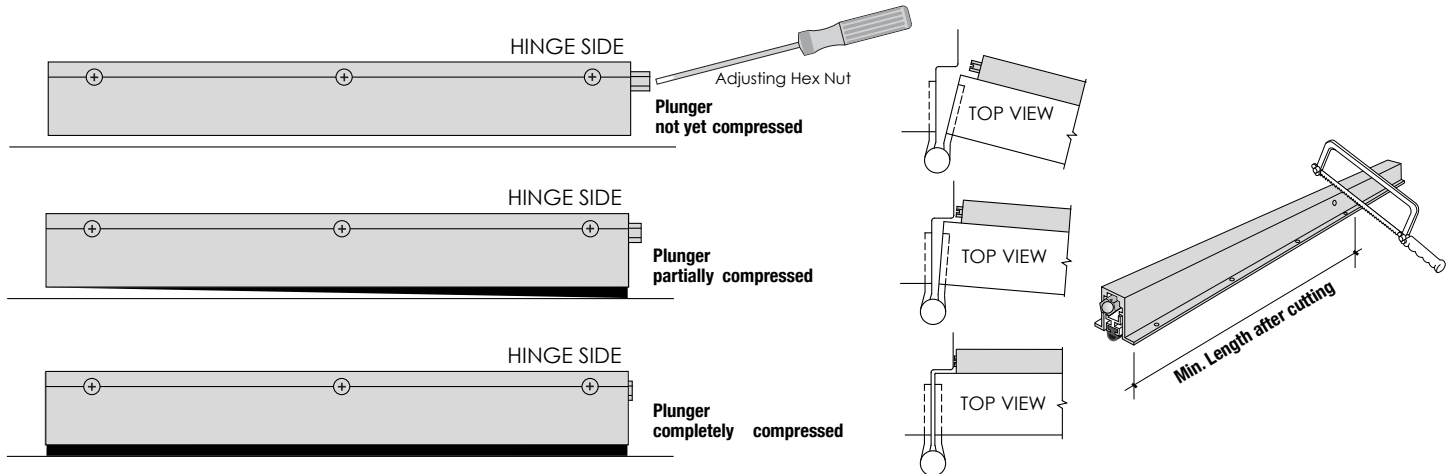


AUTO. DOOR BOTTOM LENGTH	16" (406)	16"+ to 18" (406+ - 457)	18"+ to 24" (457+ - 610)	24"+ to 30" (610+ - 762)	30"+ to 32" (762+ - 813)	32"+ to 36" (813+ - 914)	36"+ to 42" (914+ - 1067)	42"+ to 48" (1067+ - 1219)
MINIMUM LENGTH AFTER CUTTING	14"	15.5"	17"	22"	26"	29"	34"	42"

*Does not apply for Light Spring types or part #367, #368, #369. Special order for 12" - 16" long door bottom, available with maximum length 168".

END CAPS


Aluminum plates .063" thick. Available for #320, 321, 350, 351, 360, 361, 365, 367. Supplied standard.

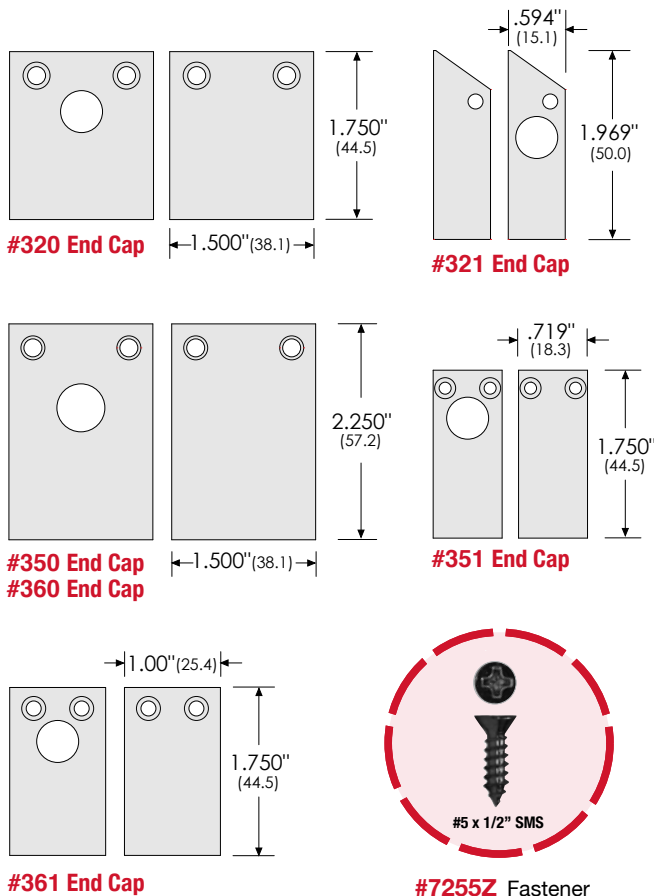

OPTIONS

● Concealed Door Bottom - Easy Access #Z49 Holding Plates

Z49 plates are designed to secure Automatic Door Bottoms to the door using no bottom screws. The unit can be removed from either end without taking the door off the frame. (Specify to order, e.g. #360-Z49)

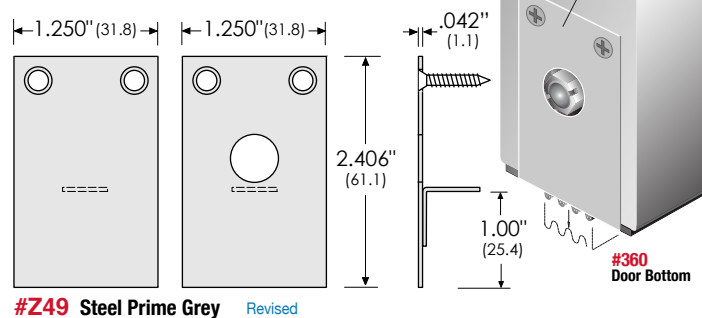

● Locking Key & Water Shed

#8361 Key
Locking Key
(fits over adjusting nut)

