


## SP970A-D Manual & Minimum Position Pressure Regulator

### SPECIFICATION DATA

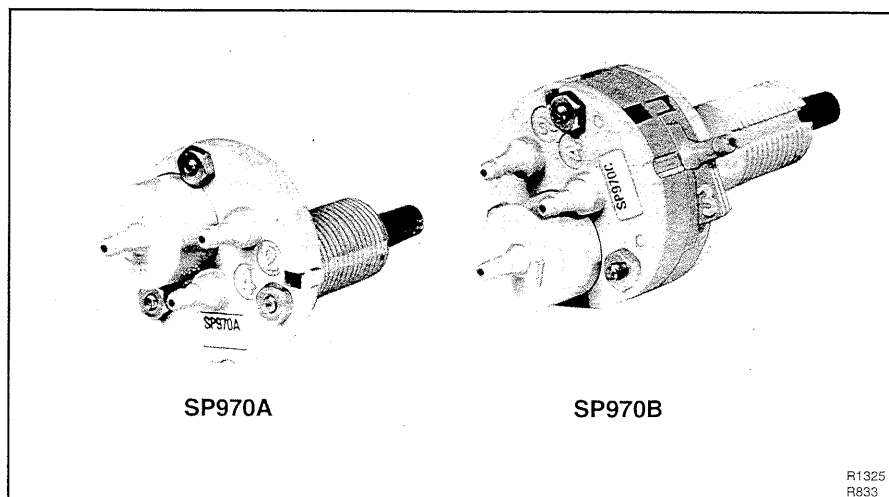

### FEATURES

- Two spans available (six with breakaways)
- Pilot bleed and isolated pilot models available
- Wall or panel mounting

### GENERAL

The SP970 Manual and Minimum Position Pressure Regulator provides regulated pressure to a controlled device such as a pneumatic damper operator. The SP970 provides either manually set pressure or manually set minimum pressure with variable maximum pressure.

## DESCRIPTION

SP970s provide regulated pressure to controlled devices such as pneumatic damper operators.

## SPECIFICATIONS

### Models:

- ☐ SP970A: Three-port pneumatic manual or minimum position switch with pilot bleed
- ☐ SP970B: Three-port pneumatic manual or minimum position switch with pilot bleed and wall mounting bracket
- ☐ SP970C: Four-port pneumatic switch with isolated pilot chamber
- ☐ SP970D: Four-port pneumatic switch with isolated pilot chamber and wall mounting bracket

### Selectable Spans for psi (kPa):

| Model      | Knob Rotation* |          |          |
|------------|----------------|----------|----------|
|            | 188            | 244      | 300      |
| Small Span | 5 (34)         | 6.5 (45) | 8 (55)   |
| Large Span | 10 (69)        | 13 (90)  | 16 (110) |

\* The setpoint knob normally rotates 188 degrees. Two breakaway stops on the knob allow 244 and 300 degrees of rotation.

### Scaleplate:

All models shipped with 0 to 100 scaleplate (including knob and locknuts). See Accessories for other available scaleplates.

### Accessories:

- ☐ 315677A Bag Assembly, used for panel mounting where panel is 5/16 to 1 in. (8 to 25 mm) thick
- Available Scaleplates:
  - ☐ 315326 (-20 to +20F)
  - ☐ 315554 (-12 to +12C)
  - ☐ 315787 (Cooler-Warmer)
- ☐ 14003030-001 Spring Clip
- ☐ 801629S Cable Clamp
- ☐ 14004396 Wall Mounting Bracket

### Operating Pressures:

Main (Port 1): 18 psi (125 kPa)

Branch (Port 2): 3 to 15 psi (21 to 103 kPa)

Pilot (Port 3 on SP970C and D, Port 4 on SP970A and B): 3 to 15 psi (21 to 103 kPa)

### Maximum Safe Air Pressure:

30 psi (207 kPa)

### Air Capacity:

SP970A and B: Above minimum position, device feeding pilot determines capacity. Below minimum position, air capacity is 0.022 scfm (10 ml/s)

SP970C and D: 0.022 scfm (10 ml/s)

### Air Consumption:

0.022 scfm (10 ml/s)

### Air Connections:

Push-on barbs for 5/32-in. (4-mm) O.D. plastic tubing

### Construction:


Molded plastic with neoprene diaphragm

### Mounting:

SP970A and C: Normally panel mounted. See Accessories for spring clip or cable clamp required for wall mounting without scaleplate.


SP970B and D: Wall mounted. Bracket has two 1/4-in. (6 mm) slots for mounting.

Dimensions In Inches (Millimeters):

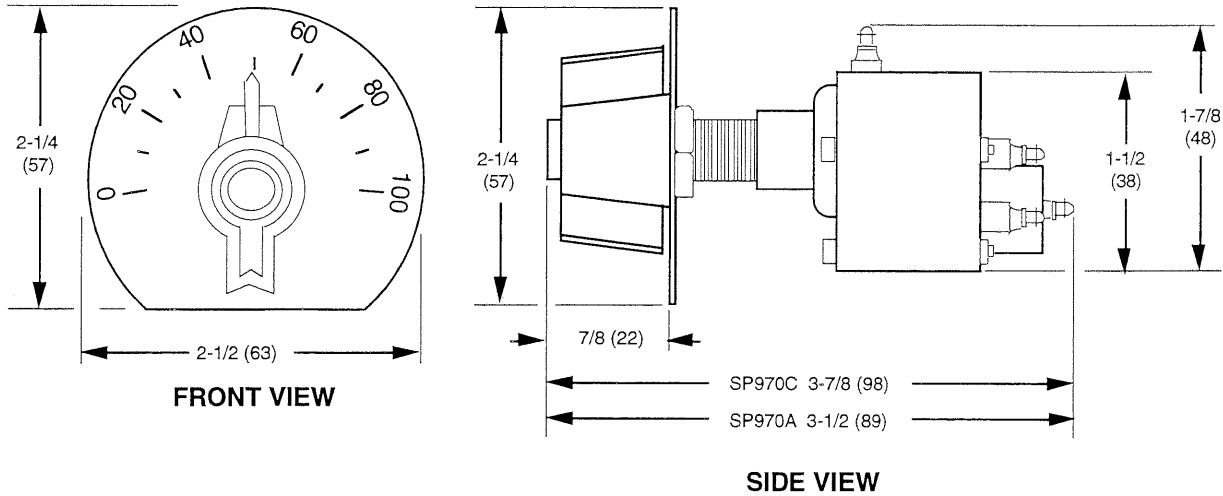

C4857

SP970A and C with Scaleplate and Knob Attached.

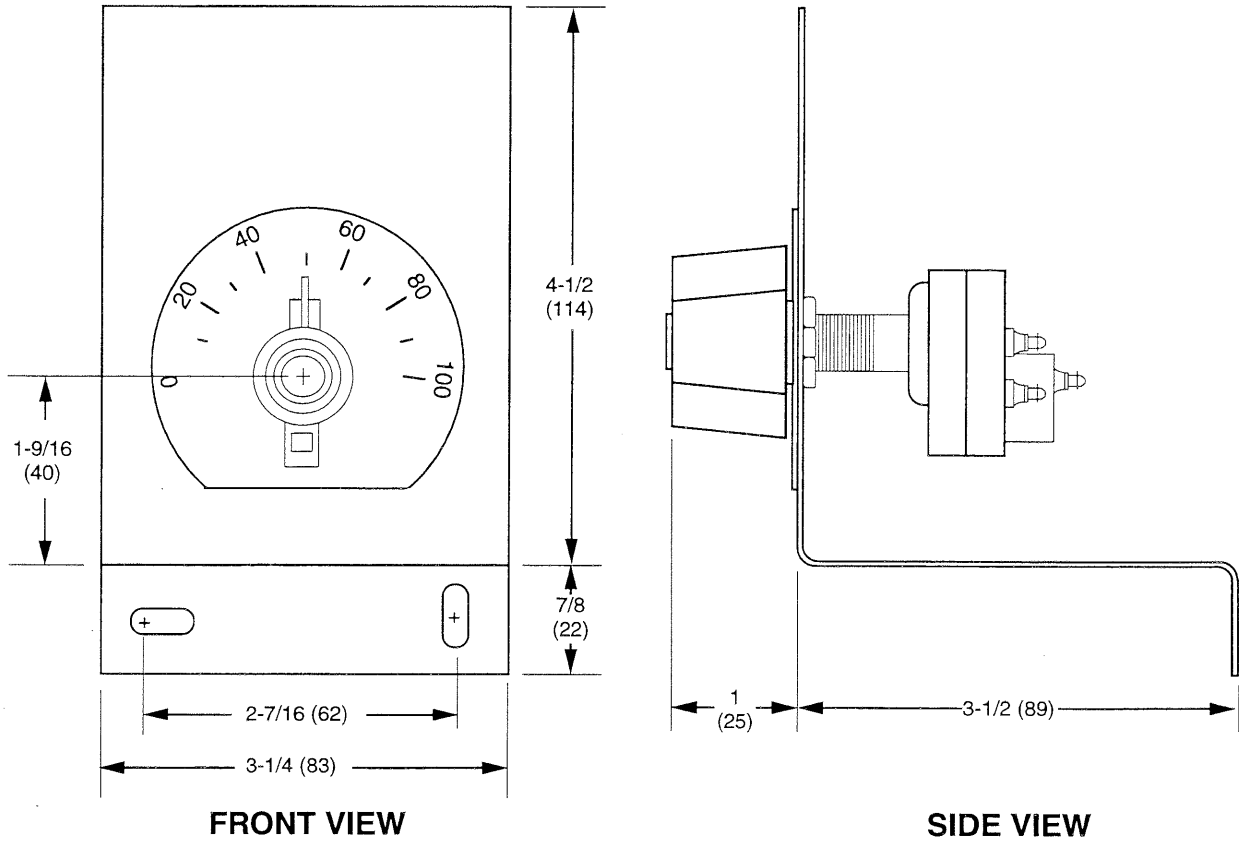

C4858-1