


PRODUCT SPECIFICATION DRAWING

TESTRITE® TR4-TWV

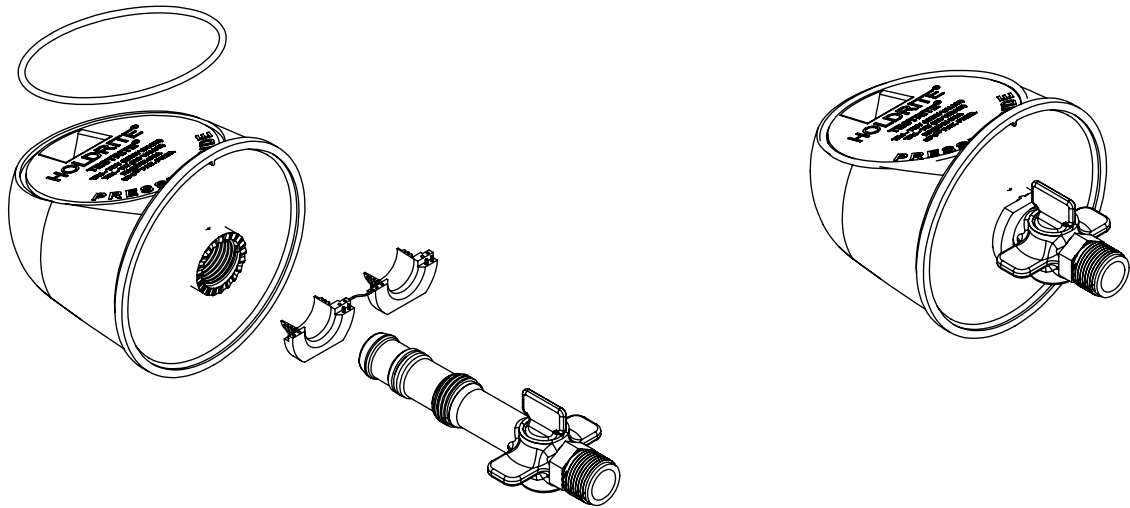

The TESTRITE® TR4-TWV is used in conjunction with TR4-PVC-H, TR4-PVC-NH and TR4-ABS-H, which allows temporary blocking of the DWV stack for testing while providing connections for convenient system fill and drain.

Product Information:

- Material:
 - Wedge: Nylon 6/6, Orange
 - Fill Stem: Nylon 6/6, Black
 - Lock nut: Nylon 6/6, Black
- Pressure rating with TESTRITE® TR4 fittings (max): 15 psi (water) / 5 psi (air)
- For use only with TESTRITE® TR4 fittings
- Patent Pending

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	

.....HUBBARD ENTERPRISES.....
HOLDRITE®
 "Converting Makeshift Methods into Engineered Solutions"™