

Centrifugal Ventilators

Direct-Drive Downblast Centrifugal Roof & Wall Ventilators

Direct-drive downblast ventilators are designed for use where steady exhaust ventilation is needed under low to moderate static pressure conditions.

Agency Listing

- All ventilators are UL Standard 705 listed
- Ventilators are CSA listed according to Standard C22.2 No. 113-M1984 (Fans & Ventilators)


Features and Specifications

- Downblast discharge design exhausts foul air from industrial and commercial buildings
- Ventilators can be mounted on the roof or wall
- Durable spun aluminum construction with steel support braces
- Backward inclined aluminum fan wheel
- Externally cooled motor compartment
- Motor located out of discharge airstream
- Motors are 115V or 115/230V, 60 Hz, ball bearing motors with Class B insulation
- PSC motors included in standard design (shaded pole motor style used for 8" models)

- One-piece removable exhaust hood
- Inlet temperatures up to 170°F
- Built-in bird screen to protect discharge and ensure safe, obstruction-free operation
- Motor and wheel are easily detachable without removing ventilator from curb
- Junction box mounted in motor compartment
- Windband rolled bead for added strength and easy maneuverability
- Welded curb cap corners eliminate water entry into ducts or building
- All units are speed controllable

Accessories (available separately)

- For more information, see Power Roof Ventilator Accessories
- Speed controllers
- Backdraft dampers
- NEMA 1, NEMA 3R and NEMA 4 disconnect switches
- Fixed mounting curbs

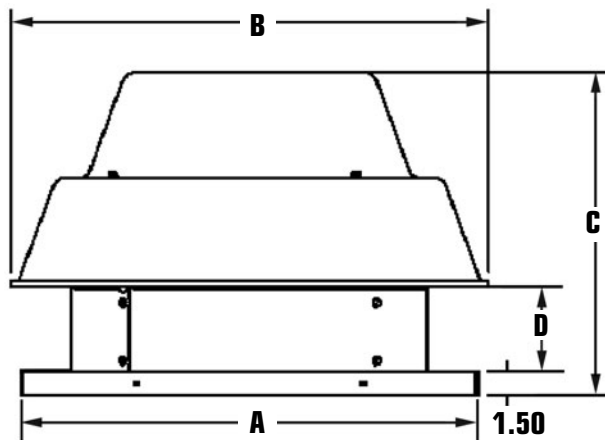

Fantech, Inc. and Systemair Mfg. Inc. certify that the Direct-Drive Downblast Centrifugal Roof & Wall Ventilators shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Model No.	Wheel Diameter (In.)	Wheel Bore Size (In.)	Dimensions (In.)				Gauge Thickness (In.)			Total Ship Wt. (lbs.)	Recommended Roof Opening (In.)	Optional Accessories			
			A	B	C	D	Baffle	Venturi	Dome			Roof Mount Backdraft Damper Model No.	Roof Curb 8" Ht. Model No.	Roof Curb 12" Ht. Model No.	Speed Control (115V Only) Model No.
5DDD084A	8	5/16	19	18-7/8	13-1/4	3-1/2	0.05	0.05	0.063	35	14-1/2 x 14-1/2	5ACC12RD	5ACC17FS	5ACC17FT	5ACC03SC
5DDD085A	8	5/16	19	18-7/8	13-1/4	3-1/2	0.05	0.05	0.063	35	14-1/2 x 14-1/2	5ACC12RD	5ACC17FS	5ACC17FT	5ACC03SC
5DDD106A	10-1/2	1/2	19	22-3/8	16-1/2	3-3/8	0.05	0.05	0.063	45	14-1/2 x 14-1/2	5ACC12RD	5ACC17FS	5ACC17FT	5ACC03SC
5DDD10AA	10-1/2	1/2	19	22-3/8	16-1/2	3-3/8	0.05	0.05	0.063	45	14-1/2 x 14-1/2	5ACC12RD	5ACC17FS	5ACC17FT	5ACC03SC
5DDD128A	12-1/4	1/2	22	24-1/4	17-1/8	4	0.063	0.08	0.08	45	17-1/2 x 17-1/2	5ACC15RD	5ACC20FS	5ACC20FT	5ACC03SC
5DDD12CA	12-1/4	1/2	22	24-1/4	17-1/8	4	0.063	0.08	0.08	45	17-1/2 x 17-1/2	5ACC15RD	5ACC20FS	5ACC20FT	5ACC06SC
5DDD138A	13-1/2	5/8	22	25-5/8	18-1/8	4-3/8	0.063	0.08	0.08	50	17-1/2 x 17-1/2	5ACC15RD	5ACC20FS	5ACC20FT	5ACC03SC
5DDD13DB	13-1/2	5/8	22	25-5/8	18-1/8	4-3/8	0.063	0.08	0.08	50	17-1/2 x 17-1/2	5ACC15RD	5ACC20FS	5ACC20FT	5ACC10SC
5DDD15AA	15	5/8	26	27-7/8	18-1/2	4-3/8	0.063	0.08	0.08	66	21-1/2 x 21-1/2	5ACC19RD	5ACC24FS	5ACC24FT	5ACC03SC
5DDD15CA	15	5/8	26	27-7/8	18-1/2	4-3/8	0.063	0.08	0.08	66	21-1/2 x 21-1/2	5ACC19RD	5ACC24FS	5ACC24FT	5ACC06SC
5DDD16BA	16-1/2	5/8	26	29-3/4	20-1/4	4-3/4	0.063	0.08	0.08	70	21-1/2 x 21-1/2	5ACC19RD	5ACC24FS	5ACC24FT	5ACC06SC
5DDD16DB	16-1/2	5/8	26	29-3/4	20-1/4	4-3/4	0.063	0.08	0.08	70	21-1/2 x 21-1/2	5ACC19RD	5ACC24FS	5ACC24FT	5ACC10SC
5DDD18CA	18-1/4	5/8	30	31-5/8	21-3/8	5-5/8	0.063	0.08	0.08	86	25-1/2 x 25-1/2	5ACC23RD	5ACC28FS	5ACC28FT	5ACC06SC
5DDD18EB	18-1/4	5/8	30	31-5/8	21-3/8	5-5/8	0.063	0.08	0.08	86	25-1/2 x 25-1/2	5ACC23RD	5ACC28FS	5ACC28FT	5ACC10SC

Centrifugal Ventilators

Direct-Drive Downblast Centrifugal Roof & Wall Ventilators

Model Number	HP	RPM	TS (FPM)	0.0" SP		0.125" SP		0.250" SP		0.375" SP		0.500" SP		0.625" SP		.750" SP		.875" SP		1.00" SP		1.25" SP		
				Volts	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM	CFM
				FLA	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP	Sones† BHP
5DDD084A	1/100	1263	3435	115	370	212	87																	
				1.5 1.5	5.8 —	3.3 —	2.6 —																	
5DDD085A	1/25	1661	3456	115	414	345	259	157																
				1.7 2.3	6.8 —	6.0 —	5.9 —	5.4 —																
5DDD106A	1/20	1150	3023	115	645	484	309																	
				1.7 4.0	5.5 —	5.5 —	5.0 —																	
5DDD10AA	1/6	1720	4728	115	985	911	824	724	619	498	352													
				1.8	9.6 —	9.4 —	9.1 —	8.1 —	7.9 —	7.8 —	— —													
5DDD128A	1/12	880	2822	115	902	789	658	297																
				6.2/3.1	5.4 0.06	5.0 0.06	4.6 0.07	5.0 0.05																
5DDD12CA	1/3	1694	5519	115	1743	1670	1605	1543	1475	1392	1316	1232	1137	889										
				2.4 4.4	15.6 0.35	15.3 0.35	14.9 0.36	14.6 0.36	14.2 0.37	13.8 0.38	13.6 0.39	13.4 0.39	13.2 0.39	13.1 0.38										
5DDD138A	1/12	869	3071	115	1257	1135	977	711																
				3.6	7.8 0.07	6.4 0.08	5.5 0.09	5.5 0.08																
5DDD13DB	1/2	1684	5952	115/230	2226	2164	2102	2040	1970	1897	1813	1740	1657	1469										
				6.2/3.1	18.2 0.44	17.5 0.47	17.1 0.48	15.6 0.49	14.2 0.51	13.4 0.54	12.7 0.56	11.4 0.57	12.2 0.56	13.9 0.56										
5DDD15AA	1/6	866	3401	115	1716	1563	1384	1166	664															
				4.4	7.5 0.14	7.1 0.15	6.8 0.16	6.1 0.16	5.6 0.13															
5DDD15CA	1/3	1124	4496	115	2160	2045	1930	1792	1645	1481	1255	767												
				8.4/4.2	11.9 0.32	11.5 0.33	11.1 0.34	10.3 0.34	9.7 0.34	9.1 0.34	9.0 0.34	9.0 0.28												
5DDD168A	1/4	868	3749	115	2337	2191	2038	1835	1573	599														
					11.0 0.24	9.6 0.25	8.9 0.25	6.7 0.26	6.5 0.26	6.8 0.24														
5DDD16DB	1/2	1143	4937	115/230	2914	2787	2660	2526	2389	2231	2061	1848	1493											
					15.9 0.45	14.7 0.46	14.2 0.48	13.4 0.49	11.7 0.50	10.3 0.50	10.3 0.50	10.1 0.50	11.0 0.49											
5DDD18CA	1/3	856	4090	115	3120	2948	2767	2556	2270	1865	896													
					15.1 0.34	13.3 0.36	11.3 0.36	8.6 0.36	6.4 0.36	7.4 0.36	8.5 0.26													
5DDD18EB	3/4	1106	5284	115/230	4037	3902	3766	3629	3476	3324	3147	2970	2765	1407										
					19.8 0.75	19.5 0.77	19.2 0.80	18.8 0.82	18.4 0.85	18.0 0.87	17.8 0.89	17.7 0.89	17.5 0.89	18.5 0.57										

Performance certified is for installation type A: free inlet, free outlet. Performance rating includes the effects of bird screen. Speed (RPM) shown is nominal, and performance is based on actual speed of test.

† The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA standard 301. Values shown are for installation type A, free inlet hemispherical sone levels.

Typical Specifications:

Direct-Drive Downblast Roof & Wall Exhaust Fans

Roof & wall mount exhaust fans shall be centrifugal downblast direct-drive type. The fan wheel shall be centrifugal backward inclined, blades and wheel cone to be constructed of aluminum and shall include a wheel cone matched to the inlet cone for precise running tolerances. Wheels shall be statically and dynamically balanced. The fan housing shall be constructed of heavy gauge aluminum with a rigid steel support structure. Baffles and motor compartment hoods shall have a rolled bead for added strength. Motors shall be mounted out of the airstream. Fresh air for motor cooling shall be drawn into the motor compartment from an area free of discharge contaminants. Motors shall be readily accessible for maintenance. A junction box shall be factory installed to permit a disconnect switch to be wired to the fan motor within the motor compartment. A conduit chase shall be provided through the curb cap to the motor compartment for ease of electrical wiring. All fans shall bear the AMCA Certified Ratings Seal for sound and air performance. Each fan shall bear a permanently affixed manufacturer's nameplate containing model number and carry a one-year warranty. Fans shall be Fantech Model Direct-Drive Downblast Centrifugal Roof & Wall Ventilators as manufactured by Systemair Mfg. Inc., Lenexa, Kansas.

Centrifugal Ventilators

Direct-Drive Downblast Centrifugal Roof & Wall Ventilators – Octave Sound Data

The sound power ratings shown are in decibels, referred to 10^{-12} Watts calculated per AMCA Standard 301. Values shown are for inlet L_{w_i} A sound power levels for installation Type A: free inlet, free outlet. Ratings do not include the effects of duct end correction. For models shown on this page, the AMCA Certified Ratings Seal applies to air performance and some values only.

Model 5DDD084A; Wheel Dia. 8" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/100	1263	0	65	67	72	62	54	52	49	43	66
		0.13	69	66	71	61	54	52	49	42	65
		0.25	67	67	70	60	53	50	48	41	64

Model 5DDD085A; Wheel Dia. 8" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/25	1650	0	62	66	71	63	63	55	54	45	67
		0.13	62	65	71	62	58	53	51	43	65
		0.25	63	65	72	60	55	52	48	41	65

Model 5DDD106A; Wheel Dia. 10-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/12	1150	0	63	68	68	57	54	52	48	37	63
		0.13	66	68	67	55	51	48	45	36	61
		0.25	66	67	65	52	50	47	43	35	59
		0.38	73	68	65	51	50	46	42	34	59

Model 5DDD10AA; Wheel Dia. 10-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/6	1720	0	67	75	78	72	66	63	61	55	74
		0.5	70	75	76	69	62	60	58	52	71

Model 5DDD128A; Wheel Dia. 12-1/4" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/12	880	0	59	68	66	61	60	55	47	40	64
		0.25	56	64	63	58	52	47	41	37	59

Model 5DDD12CA; Wheel Dia. 12-1/4" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/3	1694	0	77	79	81	78	72	70	67	59	79
		0.5	76	79	81	76	68	67	65	57	77
		1	76	78	79	74	66	66	63	58	76

Model 5DDD138A; Wheel Dia. 13-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/12	869	0	62	71	70	68	55	56	50	44	68
		0.25	62	69	68	68	56	52	46	42	67

Model 5DDD13DB; Wheel Dia. 13-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/2	1684	0	73	77	85	79	71	69	68	65	80
		0.5	72	77	84	78	70	68	67	63	79
		1	71	77	82	76	68	67	66	62	78
		1.5	72	76	80	74	67	66	65	61	76

Model 5DDD15AA; Wheel Dia. 15" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/6	866	0	65	76	72	66	62	61	53	45	69
		0.25	63	73	70	64	60	58	50	43	67
		0.5	59	71	66	61	56	50	47	41	63

Model 5DDD15CA; Wheel Dia. 15" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/3	1124	0	73	76	81	78	75	68	66	66	79
		0.5	71	75	79	76	71	66	72	70	79

Model 5DDD16BA; Wheel Dia. 16-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/4	868	0	66	77	75	69	64	64	57	48	72
		0.25	65	77	74	68	66	62	54	45	71
		0.5	65	74	70	65	62	56	51	43	67


Model 5DDD16DB; Wheel Dia. 16-1/2" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/2	1143	0	71	77	85	77	68	69	66	58	79
		0.5	69	75	83	75	67	68	62	55	78
		1	71	73	78	71	64	63	58	53	73

Model 5DDD18CA; Wheel Dia. 18-1/4" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
1/3	856	0	69	79	77	71	65	63	59	52	73
		0.25	68	79	76	70	63	61	57	50	72
		0.5	67	78	74	68	62	60	56	49	71


Model 5DDD18EB; Wheel Dia. 18-1/4" Sound Data											
HP	RPM	SP	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L_{w_i} A
3/4	1106	0	74	79	92	82	73	69	66	61	85
		0.5	72	77	92	81	72	67	64	60	85
		1	71	75	91	81	71	66	64	62	84

Centrifugal Ventilators


Direct-Drive Downblast Centrifugal Roof & Wall Ventilators – Performance Curves

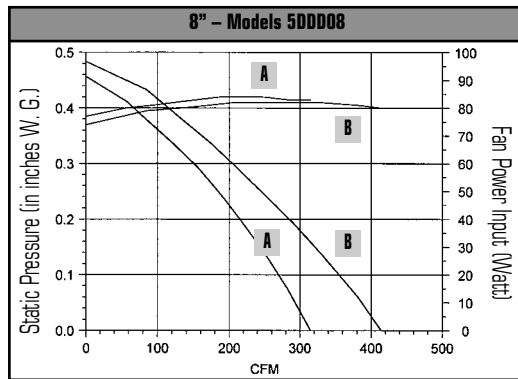


A = 5DDD084A, 1263 RPM
B = 5DDD085A, 1650 RPM

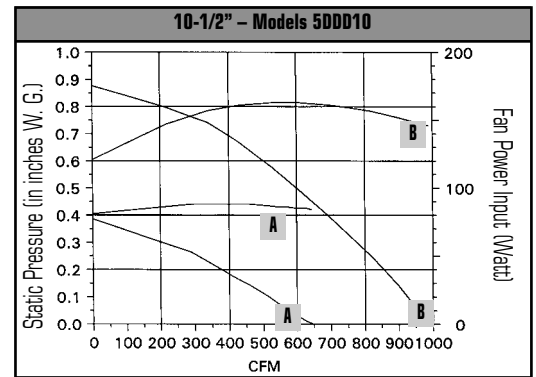


A = 5DDD106A, 1150 RPM
B = 5DDD10AA, 1720 RPM

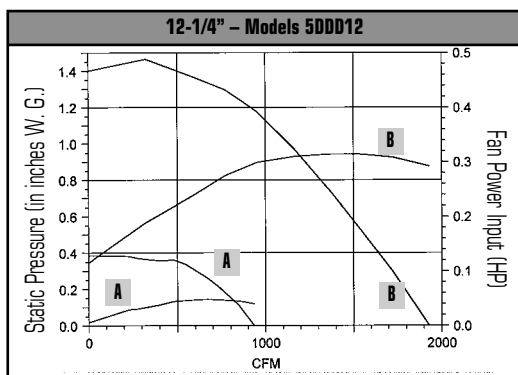


A = 5DDD128A, 880 RPM
B = 5DDD12CA, 1694 RPM

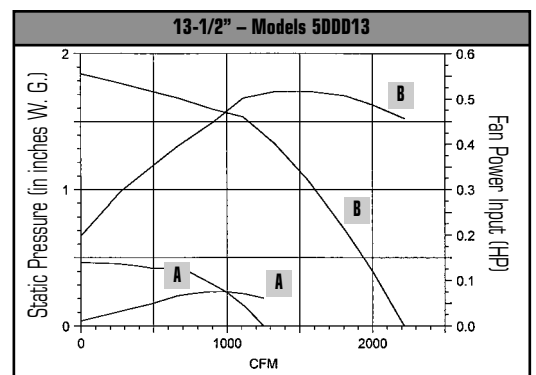


A = 5DDD138A, 870 RPM
B = 5DDD13DB, 1680 RPM

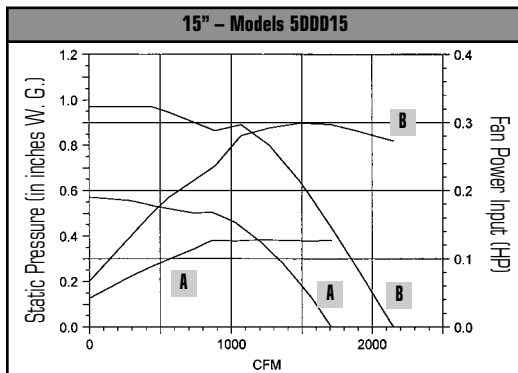

A = 5DDD15AA, 870 RPM
B = 5DDD15CA, 1145 RPM

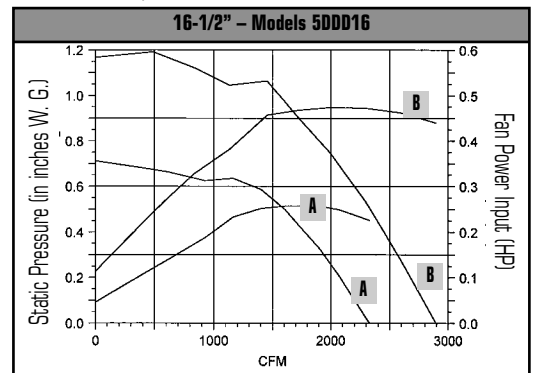

A = 5DDD168A, 870 RPM
B = 5DDD16DB, 1140 RPM

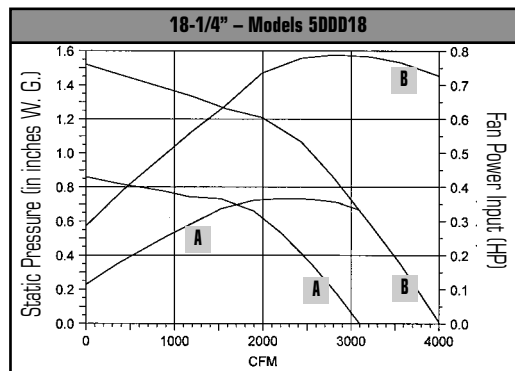

A = 5DDD18CA, 860 RPM
B = 5DDD18EB, 1110 RPM

Performance certified is for installation type A: free inlet, free outlet. Performance rating includes the effects of bird screen. Speed (RPM) shown is nominal, and performance is based on actual speed of test.