

The APD series is designed to reduce noise and vibration on the compressor discharge lines.

### Features

- Compact size
- Full flow fittings
- Solid copper connections
- Corrosion resistant epoxy powder paint finish
- Rugged steel shells for vibration resistance
- Shock resistant steel shell construction



### Specifications

- Maximum working pressure: 680 psig
- Operating Range: -40°F to +250°F
- UL/CUL file number: SA 5760


### Nomenclature example: APD 053 SB

| APD                | 05           | 3                    | S            | B                                |
|--------------------|--------------|----------------------|--------------|----------------------------------|
| Pulsation Dampener | Cubic Inches | Fitting Size in 1/8" | ODF Fittings | With Baffles (omit for standard) |

### Flow Capacity

| Fitting Size | Tons  |
|--------------|-------|
| 1/4          | 1-5   |
| 3/8          | 5-10  |
| 1/2          | 10-20 |
| 5/8          | 15-25 |
| 7/8          | 25-35 |
| 1 1/8        | 35+   |

### Dimensional Data

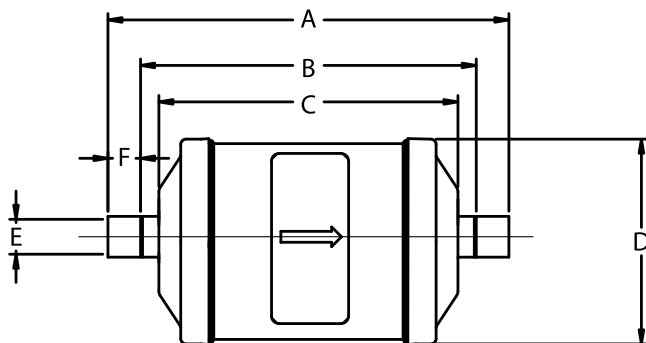

### Ordering Information

| PCN    | Description | Dimensions (in) |      |      |      |      |      |
|--------|-------------|-----------------|------|------|------|------|------|
|        |             | A               | B    | C    | D    | E    | F    |
| 061862 | APD 1R      | 6.00            | 5.00 | 4.47 | 3.02 | 0.50 | 0.50 |
| 049651 | APD 054 S-B | 4.56            | 3.56 | 3.00 | 2.63 |      |      |
| 059144 | APD 163 S   | 6.25            | 5.38 | 4.75 |      | 0.38 | 0.38 |
| 060119 | APD 165 S-B | 6.56            | 5.31 |      |      | 0.63 | 0.63 |
| 056989 | APD 309 S   | 10.25           | 8.44 | 7.50 | 3.13 | 1.13 | .88  |