




SPECIFICATION PRODUCT INFORMATION


DECORA PLUS 15 AND 20 AMPERE STRAIGHT BLADE RECEPTACLES 2-Pole, 3-Wire Grounding

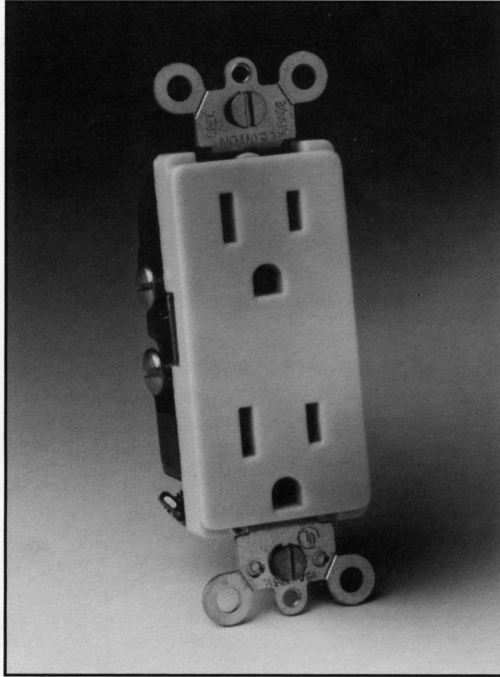

APPLICATION

In accordance with the NEC, these devices are suitable for use in all 15 or 20-ampere branch circuits of 125 or 250 volts, in commercial, industrial and institutional installations.

DECORA PLUS COMMERCIAL SPECIFICATION GRADE DUPLEX RECEPTACLES 2-Pole, 3-Wire

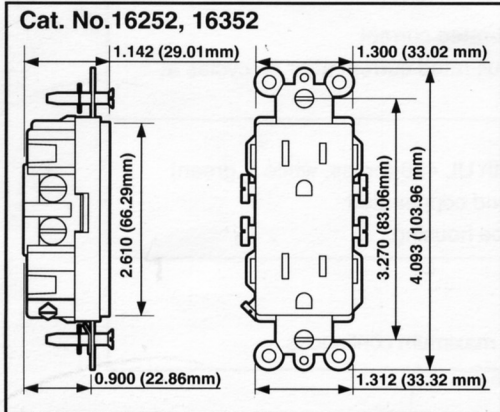

Description	Color	15A 125V	20A 125V	15A 250V	15A 125/250V Dual Voltage	20A 250V
		NEMA 5-15R	NEMA 5-20R CSA config. in Canada	NEMA 6-15R	NEMA 5-15R NEMA 6-15R	NEMA 6-20R CSA config. in Canada
Decora-Plus Duplex Receptacle, smooth face, multi-piece steel strap back and side wired	Brown	16252	16352	—	—	—
	Gray	16252-GY	16352-GY	—	—	—
	Ivory	16252-I	16352-I	—	—	—
	White	16252-W	16352-W	—	—	—
	Black	16252-E	16352-E	—	—	—
Decora-Plus Single Receptacle*, smooth face, multi-piece steel strap, back and side wired	Brown	16251	16351	16651	—	16451
	Ivory	16251-I	16351-I	16651-I	—	16451-I
	White	16251-W	16351-W	16651-W	—	16451-W
Decora-Plus Duplex Receptacle, smooth face, multi-piece steel strap side wired	Brown	16242	16342	16641	—	—
	Gray	16242-GY	16342-GY	—	—	—
	Ivory	16242-I	16342-I	16641-I	—	16441-I
	White	16242-W	16342-W	16641-W	—	16442-W
Decora-Plus Single Receptacle*, smooth face, multi-piece steel strap side wired	Brown	16241	16341	16651	—	16441
	Ivory	16241-I	16341-I	16651-I	—	16441-I
	White	16241-W	16341-W	16651-W	—	16441-W
	Almond	—	16341-A	—	—	16441-A
Decora-Plus Dual Voltage Receptacle smooth face, multi-piece steel strap, back and side wired	Brown	—	—	—	16292	—
	Ivory	—	—	—	16292-I	—
	White	—	—	—	16292-W	—

Note: 20 Ampere receptacles available in Canadian CSA configuration 4th quarter 1994.
*Single receptacles meet 1995 UL 498 standards but are of different construction from duplex receptacles listed above.
Consult your Leviton representative for details.



TYPICAL SPECIFICATION DECORA PLUS COMMERCIAL RECEPTACLES

Straight Blade 15 Amp and 20 Ampere 2-pole, 3-wire grounding back-wire and sided wire duplex receptacles shall be Leviton Decora Plus, with Decora-style opening, UL Listed 264B, with ratings and colors as scheduled on plan.

FEATURES

- Constructed with impact-resistant thermoplastic cover and body with face locked into base by four corner latches to remain securely fastened
- Have a .042" thick preplated locked-in steel mounting strap
- .031" brass ground contacts for superior ground conductivity
- Incorporate V-shaped, serrated back wiring clamps for back and side-wired versions that provide three-point contact for superior conductivity
- Provide dual ground connection option via integral green grounding screw and patented Groundamatic brass self-grounding clip riveted to the strap for automatic ground connection when mounted in a properly grounded metal wall box
- Back and side wiring options with eight deep-funnel back-wiring holes that accept No. 10 to 14 AWG copper and copper-clad wire.
- Zinc die-cast bushing secures the assembly in the middle providing superior construction
- Smooth Decora-style face does not collect dirt, and is easy to clean
- Convenient break-off tabs allow easy-two-circuit conversion
- Convenient break-off tabs allow easy two-circuit conversion
- Limited Ten Year Warranty

Performance Specifications	
Electrical	
Dielectric Voltage Withstand:	2,000V minimum
Maximum Working Voltage:	125V or 250V as rated
Current Interrupting:	Certified for current interrupting at full-rated current
Temperature Rise:	Maximum 30° C temperature rise at full-rated current after 50 cycles at 150% of rated current.
Mechanical	
Terminal Identification:	Terminals identified in accordance with UL 498 (brass, white & green)
Terminal Accommodation:	#14 gage through #10 gage copper and copper clad
Product Identification:	Ratings are a permanent part of device housing.
Environmental	
Flammability:	Rated V2
Operating Temperature:	From -40°C (without impact) to 65°C maximum continuous

TESTING AND CODE COMPLIANCE

The Commercial Grade receptacles listed herein are UL Listed, and are in full compliance with 1995 NEMA Standard WD-2 and WD-6, ANSI and with UL 498 standards.(UL File #13399). They are CSA Certified where applicable, (CSA File #LR406)and meet Mexican NOM standards. These receptacles are suitable for use in accordance with federal, state, county, municipal and local codes.

Leviton's Limited Ten-Year Warranty

This warranty gives you specific legal rights, and you may also have other rights which vary in different states and countries. LEVITON warrants to the original consumer purchaser that this product is free of defects in materials and workmanship for 10 years from purchase date. Leviton will correct such deficits by repair or replacement, at its option, if the product is returned prepaid, with proof of purchase date, to Leviton Manufacturing Company, Inc., Attn.: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck NY 11362-2591. This warranty does not cover labor for removal or reinstallation of the product and is void on any product installed improperly or in an improper environment, overloaded, misused, opened, abused or altered in any manner. Leviton limits the duration of any implied warranty of merchantability to 10 years and excludes incidental or consequential damages for breach of any warranty on this product. Some jurisdictions may not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you.