


Wall Fan Accessories

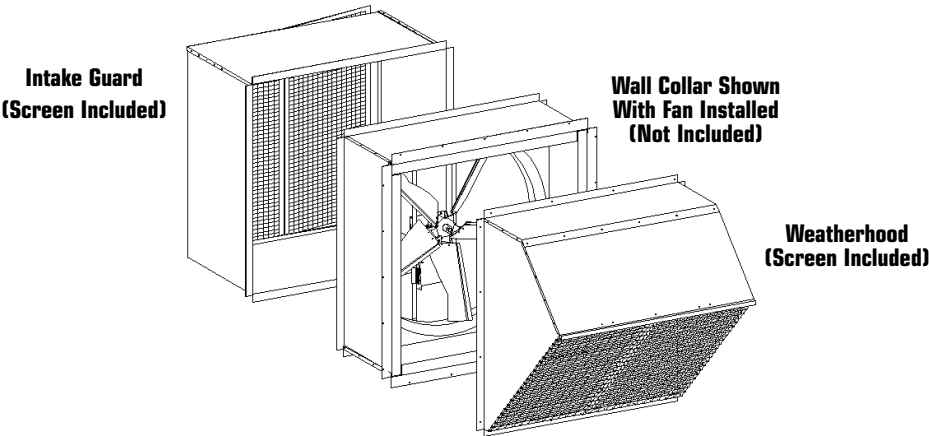


Intake Guards

- Intake guards comply with OSHA regulations
- Screens are hinged and removable for easy access
- 20-gauge galvanized steel construction

- For direct- and belt-drive propeller fans
- Shipped knocked down with assembly hardware included

WARNING: OSHA-compliant guards are required when fan is installed within 8.2 ft. (2.5M) of floor, working level or within reach of personnel. Review OSHA codes.

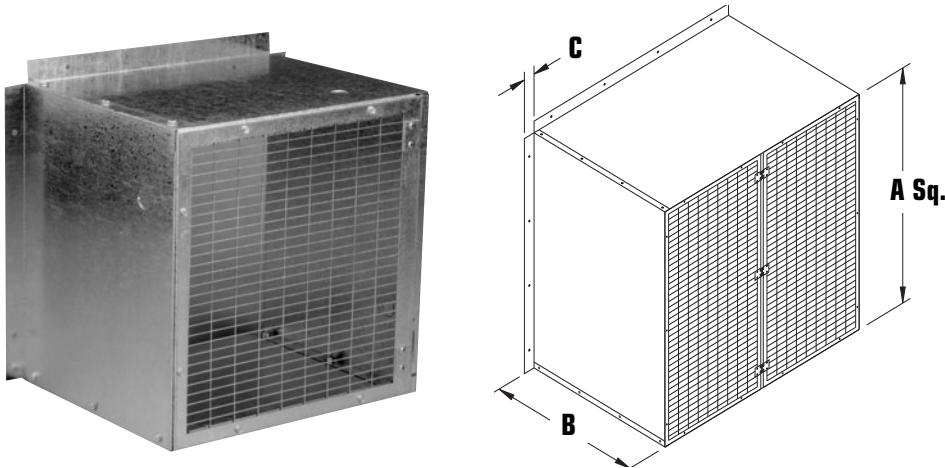


Model No.	Prop. Dia. (In.)	Dimensions (In.)			Grid Guard Sections	Side Panel Gauge	Ship Wt. (lbs.) (less motor pulleys & belts)
		A	B	C			
1ACC12SG	12	16-1/8	13	1-1/4	1	20	13
1ACC16SG	16	21-1/8	13	1-1/4	1	20	15
1ACC18SG	18	22-1/8	13	1-1/4	1	20	17
1ACC20SG	20	24-1/8	14	1-1/4	1	20	19
1ACC24SG	24	28-1/8	20	1-1/4	1	20	35
1ACC30SG	30	34-1/8	20	1-1/4	1	20	39
1ACC36SG	36	40-1/8	27	2	2	20	61
1ACC42SG	42	46-1/8	30	2	2	20	61
1ACC48SG	48	54-1/4	32	2	2	18	120
1ACC54SG	54	60-1/4	34	2	2	18	155
1ACC60SG	60	66-1/4	37	2	2	18	167

Wall Fan Accessories

Wall Collar

An easy way to install vertically mounted supply and exhaust fans. An internal flange is provided for shutter mounting. The external flange provides a flashing for the wall opening.



For direct- and belt-drive propeller fans. Galvanized steel construction. The wall collar is shipped unassembled with assembly hardware included.

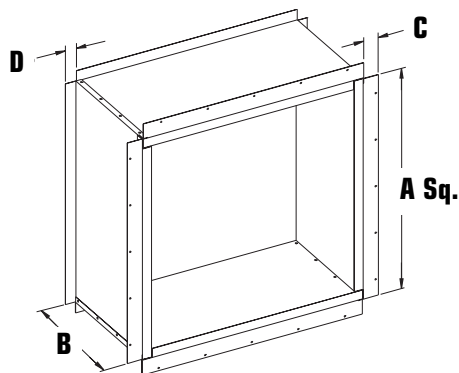

Weatherhood

Shield fan and damper openings in walls from rain and snow. For direct- and belt-drive propeller fans. Sized to easily mount to wall collar.

Galvanized steel construction. A bird screen is included. Weatherhoods are shipped unassembled with assembly hardware included.

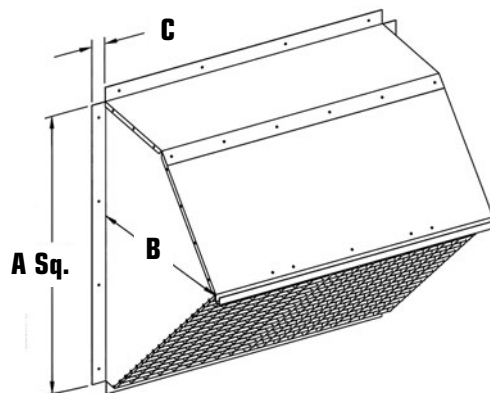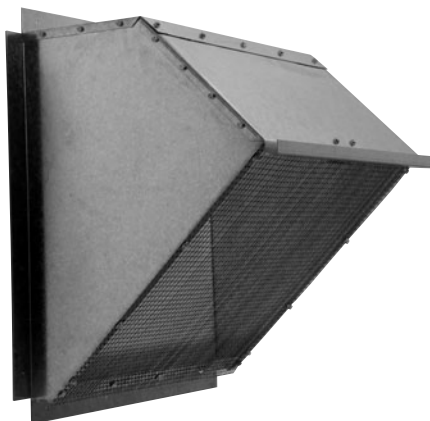

Model No.	Prop. Dia. (In.)	A	Dimensions (In.) B	C	D	Gauge	Ship Wt. (lbs.)
WALL COLLARS							
1ACC24WC	24	28-1/8	18-1/2	2-3/4	2	16	53
1ACC30WC	36	34-1/8	19-1/2	2-3/4	2	16	77
1ACC36WC	36	40-1/8	21-1/2	2-3/4	2	16	88
1ACC42WC	42	46-1/8	21-1/2	2-3/4	2	16	97
1ACC48WC	48	54-1/8	23-1/2	2-3/4	2	16	123
HEAVY-DUTY WALL COLLARS							
1ACC48HC	48	54-1/8	23-1/2	2-3/4	2	14	165
1ACC54HC	54	60-3/8	23-1/2	2-3/4	2	14	185
1ACC60HC	60	66-3/8	23-1/2	2-3/4	2	14	200
WEATHERHOODS							
1ACC24WH	24	28-1/2	21	2	—	18	33
1ACC30WH	30	34-1/8	25	2	—	18	44
1ACC36WH	36	40-1/4	29	2	—	18	62
1ACC42WH	42	40-1/4	33	2	—	18	78
1ACC48WH	48	54-1/4	38	2	—	18	103
1ACC54WH	54	60-1/4	44-1/2	2	—	18	180
1ACC60WH	60	66-1/4	48-3/8	2	—	18	205

Wall Fan Accessories

Wall Dampers

For direct-drive and belt-drive prop axial wall ventilators. Blades open when ventilator comes on, close when airflow stops.



- Galvanized 19-gauge steel frame
- Aluminum blades have felt edges for quiet operation
- Frame is 3" deep with 1-5/8" flange
- Pre-punched conduit hole knock-out
- Optional damper motors available

Model No.	Damper Size (In.)	Outside Flange Dimension (In.)	For Use With These Ventilators (UL 705 Only)	Recommended Wall Opening (In.)	Optional Damper Motor
1ACC12WD	12-1/2 x 12-1/2	15 x 15	2VLD12, 2VHD12, 2DRV12, 2STV12, 2CAV12	13 X 13	1ACC01DM
1ACC16WD	16-1/2 x 16-1/2	19 x 19	2VLD16, 2VHD16, 2DRV16, 2STV16, 2CAV16	17 X 17	1ACC01DM
1ACC18WD	18-1/2 x 18-1/2	21 x 21	2VLD18, 2VHD18, 2DRV18, 2STV18, 2CAV18	19 X 19	1ACC01DM
1ACC20WD	20-1/2 x 20-1/2	23 x 23	2VLD20, 2VHD20, 2DRV20, 2STV20, 2CAV20	21 X 21	1ACC01DM
1ACC24WD	24-1/2 x 24-1/2	27 x 27	1SDE24, 1MDE24, 1HDE24, 2VLD24, 2VHD24, 2DRV24, 2STV24, 2CAV24	25 x 25	1ACC01DM
1ACC30WD	30-1/2 x 30-1/2	33 x 33	1SDE30, 1MDE30, 1HDE30, 2STV30	31 x 31	1ACC01DM
1ACC36WD	36-1/2 x 36-1/2	39 x 39	1SDE36, 1MDE36, 1HDE36	37 x 37	1ACC01DM
1ACC42WD	42-1/2 x 42-1/2	45 x 45	1SDE42, 1MDE42, 1HDE42	43 x 43	1ACC02DM
1ACC48WD	48-1/2 x 48-1/2	51 x 51	1SDE48, 1MDE48, 1HDE48	49 x 49	1ACC02DM
1ACC54WD	54-1/2 x 54-1/2	57 x 57	1MDE54, 1HDE54	55 x 55	1ACC03DM
1ACC60WD	60-1/2 x 60-1/2	63 x 63	1MDE60, 1HDE60	61 x 61	1ACC03DM

Motorized Dampers

- Galvanized 14-gauge steel frame, 16-gauge steel blades
- Frame is 2" deep with 1-1/2" flange
- Power on to open, spring return to close
- 120/240V, 0.19/0.11 amps, 60 Hz (54" and 60" models 240V only)
- 3500 FPM max.



Model No.	Damper Size (In.)	Outside Flange Dimension (In.)	Ship Wt. (lbs.)	For Use With These Ventilators (UL 705 Only)	Recommended Wall Opening (In.)
1ACC24MD	24 x 24	27 x 27	32	1SDE24, 1SDS24, 1MDE24, 1HDE24	25 x 25
1ACC30MD	30 x 30	33 x 33	42	1SDE30, 1SDS30, 1MDE30, 1HDE30	31 x 31
1ACC36MD	36 x 36	39 x 39	70	1SDR36, 1SDE36, 1SDS36, 1MDE36, 1HDE36	37 x 37
1ACC42MD	42 x 42	45 x 45	74	1SDE42, 1SDS42, 1MDE42, 1HDE42	43 x 43
1ACC48MD	48 x 48	51 x 51	91	1SDE48, 1SDS48, 1MDE48, 1HDE48	49 x 49
1ACC54MD	54 x 54	57 x 57	115	1MDE54, 1HDE54	55 x 55
1ACC60MD	60 x 60	63 x 63	170	1MDE60, 1HDE60	61 x 61