


MODELS 678, 679, 679FL, 680 & 680FL FAN/LIGHTS

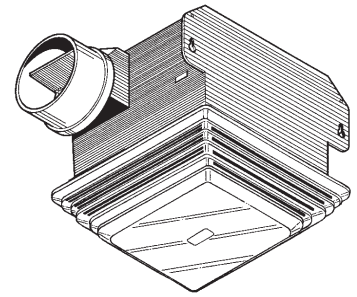

Quality and double-duty at each installation location.

FEATURES

GRILLE:

- Matte white polymeric - blends well with any decor
- Built-in light-diffusing lens accepts 13W fluorescent lamp** (Model 679FL) or 22W fluorescent lamp*** (Model 680FL) or up to 100W incandescent lamp (Models 678, 679 & 680). Bulb not included.

BLOWER:

- Plug-in, permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

Model 2677H & 3677H: Rough-in housings for 2678F, 2679F, 2680F, FL2679F and FL2680F finish assemblies (packed 4 per carton). 3677H housings include slide channels and mounting brackets.

NOTE: For installation in ceilings up to a 12/12 pitch.

U.L. Listed for use in insulated ceilings (Type I.C.)

U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit

Use supply wiring rated for at least 90° C

SPECIFICATIONS

MODEL	VOLTS	AMPS*	SONES	CFM	DUCT
678	120	1.6	2.5	50	4" Round
679	120	2.0	3.5	70	4" Round
679FL	120	1.3	3.5	70	4" Round
680	120	2.2	4.0	100	4" Round
680FL	120	1.7	4.0	100	4" Round

*Total Connected Load

TYPICAL SPECIFICATION

Fan/Light unit shall be Broan Model 678 (679) (679FL) (680) (680FL).

Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.

Blower assembly shall be removable and have a permanently lubricated motor.

Air delivery shall be no less than and sound level no greater than values listed in the "Specifications" chart on this sheet. Air and sound ratings shall be certified by HVI.


Lamp shall be 100W maximum incandescent (Models 678, 679 & 680) or 13W fluorescent** (Model 679FL) or 22W fluorescent*** (Model 680FL).

Unit shall be U.L. Listed for use over bathtubs and showers when connected to a GFCI protected branch circuit.

Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.).

**Use only one of the following 13W fluorescent lamps:
 SYLVANIA CF13DD/827
 G.E. F13DBX23T4/SPX27
 PHILIPS PL-C 13W/27/USA
 OSRAM CF13DD/827
 BROAN 97010729
 NEMA Type CFQ13W/GX23

***Use only one of the following 22W fluorescent lamps:
 SYLVANIA FDL-22
 PHILIPS PL-C 15MM/22W
 PANASONIC FDL22
 BROAN 97015191
 NEMA Type CFQ20W/GX32d

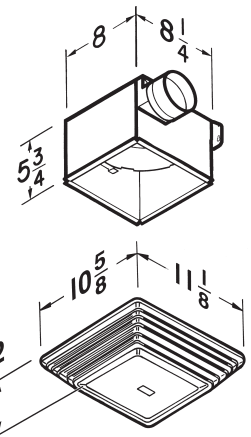

conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests



Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date