

CGi - Gold Series Gas Boiler
Weil-McLain

Water,
Induced Draft
NAT'L or LP
MBH: 50-233

Efficiency Range 82%-85%



- **HIGH EFFICIENCY**
- **EASY TO INSTALL AND SERVICE**
- **MADE WITH WEIL-McLAIN QUALITY**

APPLICATIONS INCLUDE:

Residential
Light Commercial
Multiple Boilers
Indirect-fired Water Heating
Radiant Heating
... And Much More



* Only CGi-3 & CGi-4 models



WEIL-McLAIN


www.weil-mclain.com

Model (1)	CSA Input MBH (2)	DOE Heating Capacity MBH (2)	Net AHRI Water Ratings MBH (3)	DOE Seasonal Efficiency Percent (AFUE)	Approx. Shipping Weight (Lbs)	Boiler Water Content (Gal.)	Minimum Vent Connector Diameter (4)
CGi-25	50	42	37	84.0	200	1.5	4" I.D.
CGi-3(*)	60	51	45	85.1	200	1.5	4" I.D.
CGi-4	90	76	66	85.0	245	2.1	5" I.D.
CGi-5	119	100	87	83.3	290	2.7	5" I.D.
CGi-6	167	140	122	83.3	335	3.3	5" I.D.
CGi-7	200	167	145	83.0	390	3.8	5" I.D.
CGi-8	233	194	169	82.7	420	4.4	5" I.D.

Notes:

- (1) Add "PIN" for natural gas, "PIL" for propane.
 (2) Based on standard test procedures prescribed by the United States Department of Energy.
 (3) Net AHRI ratings are based on net installed radiation of sufficient quantity for the requirements of the building and nothing needs to be added for normal piping and pick-up. Ratings are based on a piping and pick-up allowance of 115. An additional allowance should be made for unusual piping and pick-up loads.
 (4) Refer to National Fuel Gas Code, ANSI Z223.1-latest edition for chimney sizing and vent connector lengths.
 * As an Energy Star Partner, Weil-McLain has determined that the CGi-3 and CGi-4 meet the Energy Star guidelines for energy efficiency. CGi boilers are C.S.A. design certified for installation on combustible flooring. Tested for 50 psi working pressure.

Dimensions

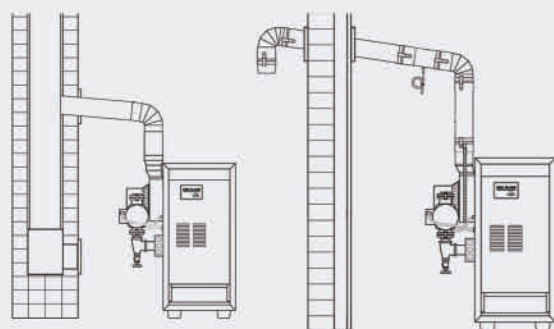


Natural Draft Venting


Direct Exhaust Venting

Model	Dimensions Inches W	Supply Piping In. (1)	Return Piping In. (1)	Nat or LP Gas Connection Size Inches	Crate Dimensions (Outside Measurements - In.)		
					Length	Width	Height
CGi-25	10	3/4	3/4	1/2	27	27 1/2	31 1/2
CGi-3	10	1	1	1/2	27	27 1/2	31 1/2
CGi-4	13	1	1	1/2	27	27 1/2	31 1/2
CGi-5	16	1	1	1/2	30	27 1/2	31 1/2
CGi-6	19	1 1/4	1 1/4	1/2	33	27 1/2	31 1/2
CGi-7	22	1 1/4	1 1/4	3/4	36	27 1/2	31 1/2
CGi-8	25	1 1/2	1 1/2	3/4	42	27 1/2	31 1/2


Notes: (1) Circulator flange supplied with boiler is same size as recommended pipe size. For supply and return boiler tapping size, see installation manual.

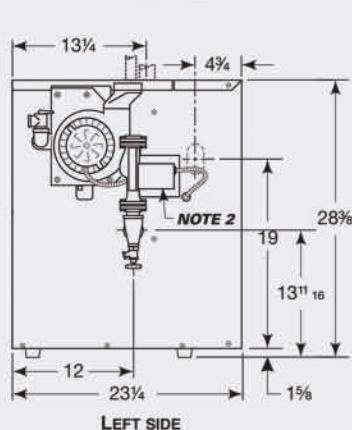


LEFT SIDE

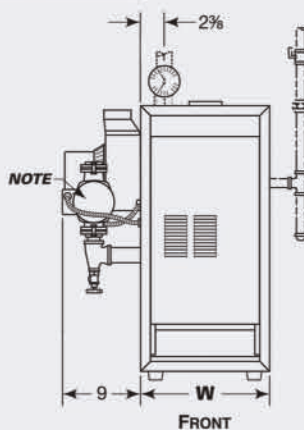

FRONT

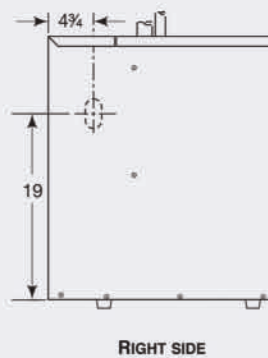

RIGHT SIDE



TOP VIEW

Note: Boiler circulator is shipped loose. Circulator may be mounted on either boiler supply or return piping. See dimension chart for pipe size of circulator flange provided.

Standard and Additional Equipment

Standard Equipment:

Factory Tested
 Two-Piece Top Jacket Panel
 Insulated Extended Steel Jacket
 Cast Iron Sections with Built-in Air Separator
 Radiation Plates
 Steel Base
 Integrated Boiler Control Module with Intermittent Electronic Ignition System & Indicator/Diagnostic Lights
 Inducer Assembly
 Flue Gas Collector/Transition Assembly
 Combination Gas Valve for 24 Volt
 Wiring Harness

Air Pressure Switch
 Non-Linting Pilot Burner
 High-Grade Stainless Steel Burners
 40VA Transformer
 Electrical Junction Box
 Rollout Thermal Fuse Element
 High-Limit Temperature Control Circulator (when ordered)
 30 PSI ASME Relief Valve (boiler sections tested for 50 PSI working pressure)
 Combination Pressure-Temperature Gauge
 Drain Valve

Additional Equipment:

CGi AL29-4C® Starter (same as CGs Starter)
 Taco 007 Circulator
 Expansion Tank Package (expansion tank, fill & check valve, auto air vent and fittings):
 #109-sizes 3 thru 5; #110-sizes 6 thru 8.
 Shipped in separate carton.
 High Altitude Kits
 W-M 5 & 10 Year Homeowner Protection Plan
 W-M Indirect-fired Water Heaters
 W-M Pool Heaters
 W-M Baseboard Units

