

DOMESTIC GAS THERMOSTATS


4625 MODEL GVAS TOP BURNER VALVES

4625 Series top burner valves are designed to fit the Robertshaw square manifold with a clip spring mount. High-Med-Low with adjustable low flow.

ORDERING DATA

UNI-LINE ORDER NO.	ORIFICE SIZE CAP	NEEDLE	STEM LENGTH	OUTLET LENGTH	COMMENTS
4625-063✓	#53	#65	1-5/16"	2-3/16"	CALORIC
4625-069✓	#50	#66	1-1/4"	3-31/32"	MAGIC CHEF 1951-330

✓ Obsolete - available to stock on hand.

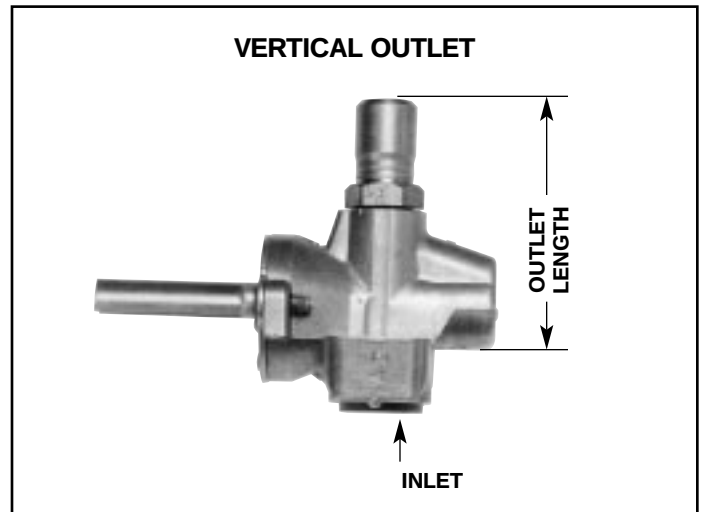

4625 BV SERIES TOP BURNER VALVES


FEATURES

- Bolt through mount for square manifold applications.
- Push to turn - on to off
- 90° rotation - CCW to full on
- Factory set for Natural Gas
- Adjustable to LP - 2 full rotations of cap
- Retention on screw heads for electric switch applications
- Gasket included and attached
- AGA certificate number T2765008

MAXIMUM AMBIENT TEMPERATURE 350°F

ORDERING DATA

UNI-LINE ORDER NO.	ORIFICE SIZE CAP	NEEDLE	STEM LENGTH	I.D. FLAT	PHOTO	COMMENTS
MODEL BV						
4625-801	#54	#65	1-1/8"	DOWN	2	MAGIC CHEF 7502P237-60
4625-802	#55	#66	11/16"	UP	2	AMANA 7720701

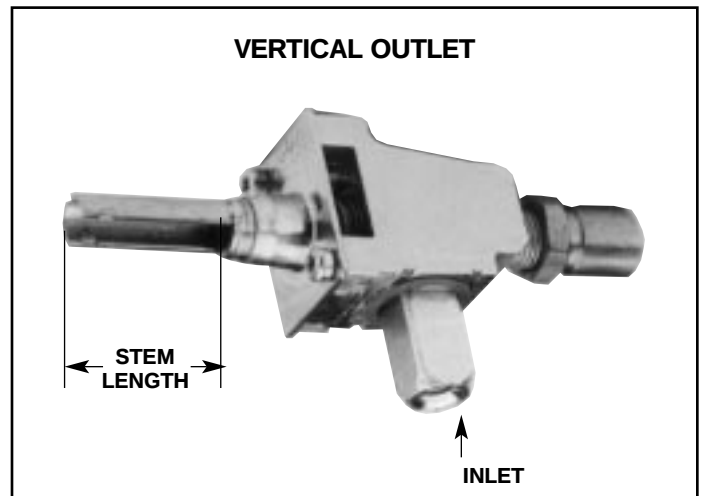

4626 SERIES

UNIVERSAL TOP BURNER VALVES

.240 stem flat height, flat down, 2" stem (from center of inlet), 1/8" pipe inlet with needle valve and orifice hood for L.P. or natural gas applications. Valve comes packaged in a plastic bag with needle and orifice hood included. For most L.P. gas applications tighten hood down against needle. For most natural gas applications tighten hood down against needle and then back it off 1-1/4 turns. In either case adjust hood until burner maintains a constant blue flame.

Btu Capacity - 57,000

AGA and CGA Approved #L1565001

ORDERING DATA

UNI-LINE ORDER NO.	COMMENTS
4626-001	
4626-002	PUSH-TO-TURN

