

Part No.	Reference No.	Quantity	Description
75010724#4PXAUP1~S	*		COIL
4PXA_4PXAUP1_123349~P	*		HIGH EFFICIENCY COIL PARTS LIST
75010729#4PXAUP1~S	*		MODEL NUMBER DESCRIPTION
OPTION#4PXAUP1~S	*		OPTIONAL KITS

NO GRAPHIC AVAILABLE

75013702

REV
A


**NO
GRAPHIC
AVAILABLE**

HIGH EFFICIENCY COIL

75010724

REV.
A

TYPICAL ILLUSTRATION

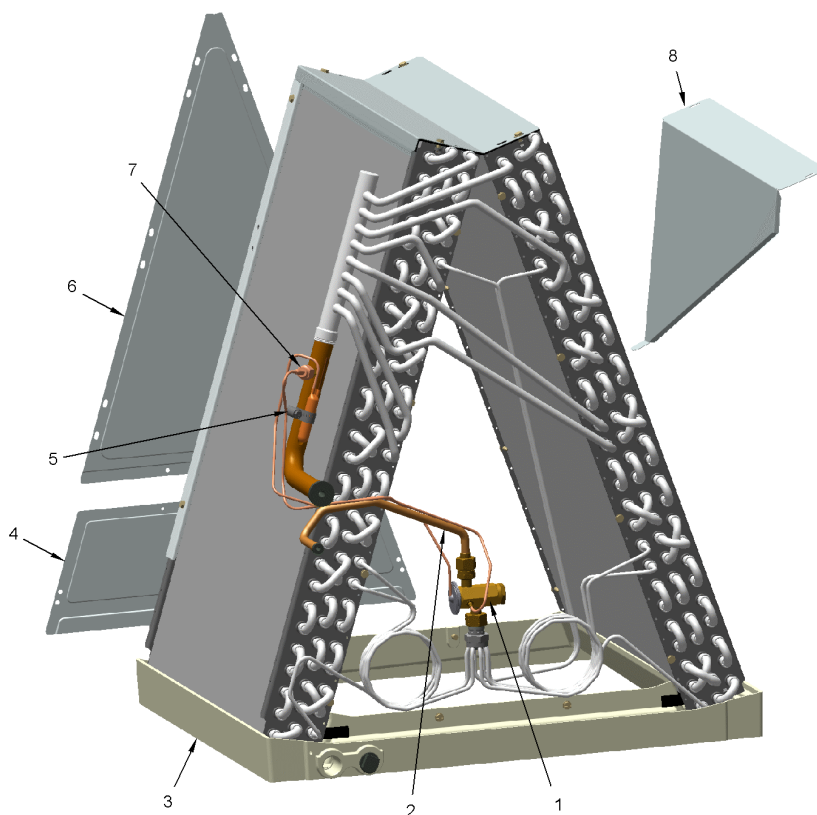


Part No.	Reference No.	Quantity	Description
75010724_4PXAUP1_272049~P	*		COIL PARTS LIST

HIGH EFFICIENCY COIL

75010724

REV.
A

TYPICAL ILLUSTRATION

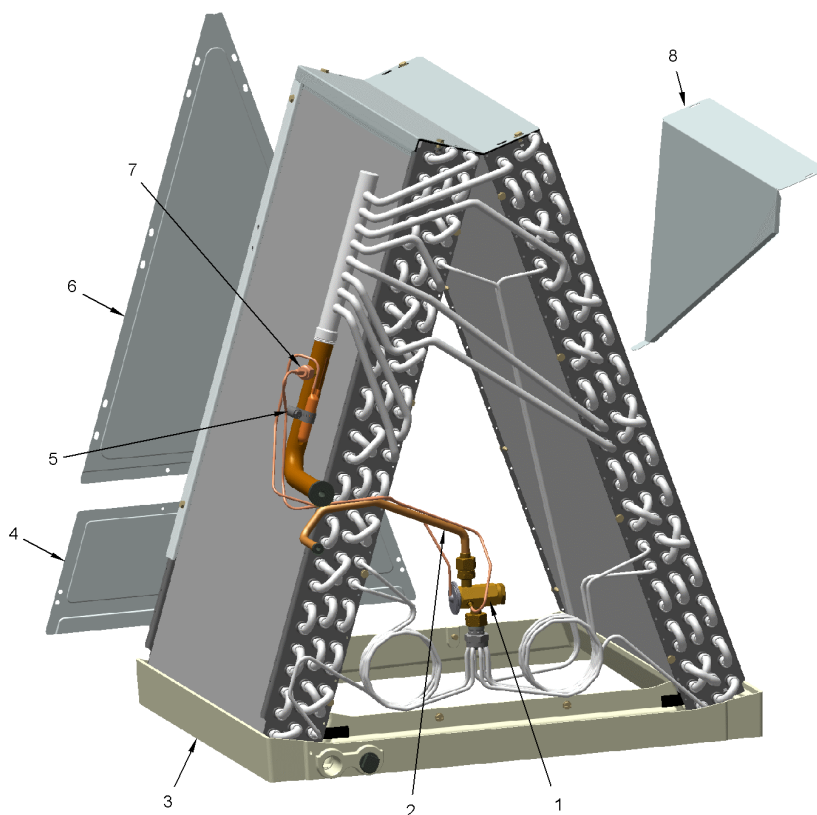

Part No.	Reference No.	Quantity	Description
SCR00965	*	28	SCREW, 10-16 AB HXW 1/2 S N
SCR00969	*	4	SCREW;10-16 BT HXW 5/8 S
VAL12309	1	1	VALVE; TXV CHATLEFF, 6 TON, 79 PSIG OUTLET AT 32F, 15 PERCENT BLEED
TUB13779	2	1	TUBE; ASSEMBLY, LIQUID. INCLUDES FLANGE FITTING, HEX NUT AND INLET SCREEN
PAN03217	3	1	PAN; DRAIN PAN ASSEMBLY, PLASTIC,19.78 X 21.10 X 2.54
PLT05401	4	2	PLATE; COIL BAFFLE, BOTTOM EMBOSSSED, 14.25 L X 5.50 H
CMP01450	5	1	CLAMP; HOSE, 11/16 - 1-1/4, 1/2 W, 5/16 HEX SCREW, STAINLESS STEEL
PLT05414	6	2	PLATE; COIL BAFFLE, TOP EMBOSSSED, 11.72 L X 21.77 H
BOD00114	7	1	BODY; VALVE, BRASS, 7/16 HEX, 7/16 -20 UNF-2A
BAF01223	8	1	BAFFLE; TOP, 17.88 X 10.00 X 2.00 TRIANGULAR GALVANIZED SHEET METAL

MODEL NUMBER DESCRIPTION

75010729

Heat Pump / Cooling Coils

Example Model Number:

4 T X C B 0 3 6 A C 3 H C A A

1 - - - 5 - - - 10 - - - 15

Digit 1 – Refrigerant Type

4 = R-410A

Digit 2 – Series

T = Premium (Heat Pump)

N = Premium (Cooling and HP)

P = Premium High Efficiency - Dedicated position (Cooling and HP)

C = Standard (Cooling Only)

F = Entry Level (Cooling Only)

Digit 3 – Coil Design

X = Direct Expansion Evaporator Coil

Digit 4 – Coil Feature

C = Cased A Coil

A = Uncased A Coil

F = Cased Horizontal Flat Coil

Digit 5 – Coil Width (Cased/Uncased)

A = 14.5" / 13.3"

B = 17.5" / 16.3"

C = 21.0" / 19.8"

D = 24.5" / 23.3"

H = 10.5"

Digit 6 – Refrigerant Line Coupling / Airflow Configuration

0 = Brazed

U = Upflow only, convertible to Horizontal Left

D = Downflow only, convertible to Horizontal Right

Digits 7,8 – Nominal Capacity in 1000's (BTUH) / Model Number Distinguisher

Digit 9 – Major Design Change

Digit 10 – Efficiency

C = Standard

S = High Efficiency (derived from 10 SEER products)

Z = High Efficiency (TXV modulates to 50%)

Digit 11 – Refrigerant Control

3 = TXV - Non-Bleed

Digit 12 – Coil Circuitry

H = Heat Pump

C = Cooling

Digit 13 – Airflow Configuration

A = Upflow

U = Upflow / Downflow

D = Downflow

R = Downflow / Horizontal Right

H = Horizontal Left / Right

C = Convertible - Upflow, Downflow, Left or Right

Digit 14 – Minor Design Change

Digit 15 – Service Digit, Not Orderable

1 of 1

Part No.	Reference No.	Quantity	Description
75010729_4PXAUP1_123354~P	*		MODEL NUMBER DESCRIPTION PARTS LIST

MODEL NUMBER DESCRIPTION		75010729	REL A
Heat Pump / Cooling Coils			
<i>Example Model Number:</i> 4 T X C B 0 3 6 A C 3 H C A A 1 - - - 5 - - - 10 - - - 15			
Digit 1 – Refrigerant Type 4 = R-410A	Digit 12 – Coil Circuitry H = Heat Pump C = Cooling		
Digit 2 – Series T = Premium (Heat Pump) N = Premium (Cooling and HP) P = Premium High Efficiency - Dedicated position (Cooling and HP) C = Standard (Cooling Only) F = Entry Level (Cooling Only)	Digit 13 – Airflow Configuration A = Upflow U = Upflow / Downflow D = Downflow R = Downflow / Horizontal Right H = Horizontal Left / Right C = Convertible - Upflow, Downflow, Left or Right		
Digit 3 – Coil Design X = Direct Expansion Evaporator Coil	Digit 14 – Minor Design Change		
Digit 4 – Coil Feature C = Cased A Coil A = Uncased A Coil F = Cased Horizontal Flat Coil	Digit 15 – Service Digit, Not Orderable		
Digit 5 – Coil Width (Cased/Uncased) A = 14.5" / 13.3" B = 17.5" / 16.3" C = 21.0" / 19.8" D = 24.5" / 23.3" H = 10.5"			
Digit 6 – Refrigerant Line Coupling / Airflow Configuration 0 = Brazed U = Upflow only, convertible to Horizontal Left D = Downflow only, convertible to Horizontal Right			
Digits 7,8 – Nominal Capacity in 1000's (BTUH) / Model Number Distinguisher			
Digit 9 – Major Design Change			
Digit 10 – Efficiency C = Standard S = High Efficiency (derived from 10 SEER products) Z = High Efficiency (TXV modulates to 50%)			
Digit 11 – Refrigerant Control 3 = TXV - Non-Bleed			
1 of 1			

Part No.	Reference No.	Quantity	Description
OPTION_4PXAUP1_311326~P	*		OPTIONAL KITS PARTS LIST

NO GRAPHIC AVAILABLE

75013702

REV
A

**NO
GRAPHIC
AVAILABLE**

Part No.	Reference No.	Quantity	Description
2AYTXVH3H6060A	*	1	KIT; FIELD MOUNTED TXV (R-22)
BAYGSKT001A0	*	1	KIT-DOWNFLOW INSULATE GSK