



PROLINE® MASTER ULTRA-LOW NOx COMMERCIAL-GRADE RESIDENTIAL

INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation & service diagnostics.

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high Energy Factor for maximum savings on operating costs.

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NOx burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NOx emissions of less than 10 ng/J.

DYNACLEAN™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.
- ProLine® Master products have increased anode protection with either longer, or multiple anodes depending on model.

PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition.

HEAT TRAP NIPPLES

- Factory-installed for faster installation

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.
- Blue Diamond® Glass coating blend is formulated in the same lab that creates the protection for our industry-leading commercial product line.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

- Top-mounted T&P relief valve available as option.

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- Certified at 300 psi test pressure and 150 psi working pressure. Listed according to ANSI Z21.10.1-CSA 4.1 standards governing storage tank-type gas water heaters.

8-YEAR LIMITED TANK AND PARTS WARRANTY





| Model Number | Gallon Capacity | First Hour Rating Gallon | Energy Factor | BTU Input Natural Gas | Recovery @ 90°F Rise Gallon Per Hour | Dimensions in Inches | | | | | | | | | Approx. Shipping Weight (lbs) |
|---------------------|-----------------|--------------------------|---------------|-----------------------|--------------------------------------|----------------------|--------|----|--------|---|--------|--------|--------|------------|-------------------------------|
| | | | | | | A | B | C | D | E | F | G* | H* | Draft Hood | |
| Tall Models | | | | | | | | | | | | | | | |
| HUR 40 | 40 | 71 | 0.63 | 40,000 | 41 | 62 | 58-1/4 | 20 | 12 | 8 | 52 | N/A | N/A | 3 or 4 | 125 |
| HUR 50 | 50 | 91 | 0.62 | 40,000 | 42 | 60-3/4 | 57-1/4 | 22 | 12 | 8 | 50-1/2 | N/A | N/A | 3 or 4 | 148 |
| HURT 50L* | 50 | 98 | 0.60 | 50,000 | 51 | 61 | 57-1/2 | 22 | 12-1/4 | 8 | 50-1/2 | 12-1/4 | 50-1/2 | 4 | 177 |
| Short Models | | | | | | | | | | | | | | | |
| HURL-40 | 40 | 69 | 0.62 | 40,000 | 41 | 51-1/2 | 47-3/4 | 22 | 12 | 8 | 41-1/4 | N/A | N/A | 3 or 4 | 138 |

All models may be ordered from the factory with top T&P.

*Standard with side recirculating taps (model HURT-50L).

Most models approved for installation from sea level to 7,700 ft. elevation (except on HURT-50L which is approved to 5,400 ft.).

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

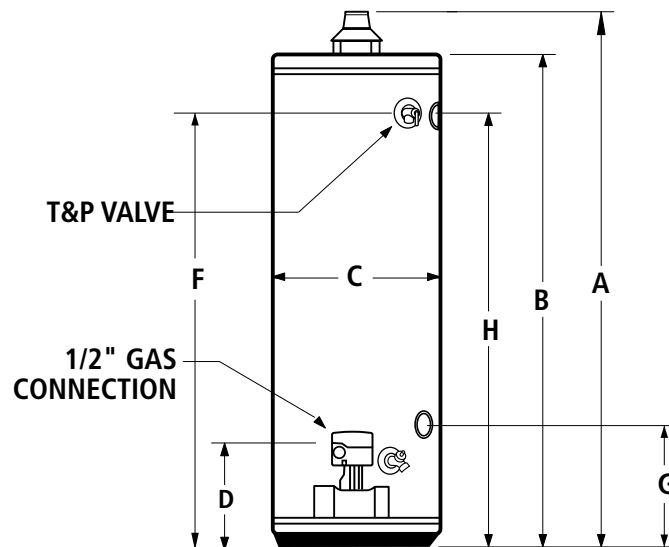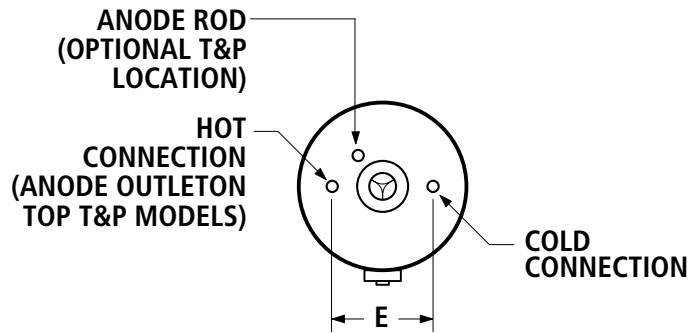

Maximum Hydrostatic Working Pressure: 150 PSI

For technical information call 800-527-1953. A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.