



560B & 560G

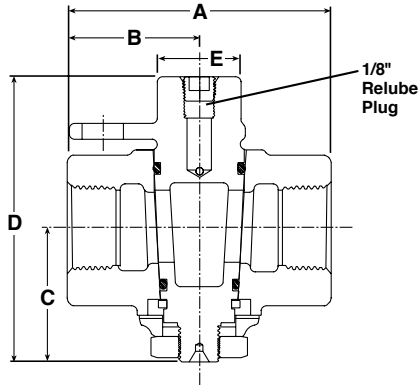

SIZE	A	B	C	D	E	WT lbs.
1/2	3 3/16	1 11/32	1 5/8	3 15/32	1	1.8
1/2x3/4	3 3/16	1 11/32	1 5/8	3 15/32	1	1.8
3/4	3 3/16	1 11/32	1 5/8	3 15/32	1	1.8
3/4x1	3 5/16	1 9/16	1 5/8	3 15/32	1	2.5
1	3 3/8	1 19/32	1 7/8	3 11/16	1 1/8	2.4
1 1/4	3 7/8	1 15/16	2 3/8	4 11/16	1 3/8	3.9
1 1/2	4 5/8	2 5/16	2 11/16	5 7/16	1 5/8	6.9
2	5 5/8	2 13/16	3	5 13/16	1 7/8	9.5

TAMPERPROOF • 175 PSIG • FLAT HEAD - LOCKWING

- **560B** - Black Iron
- **560G** - Zinc Coated with a Clear Chromate Finish Iron
- Brass Plug
- Inlet - F.I.P. Threads
- Outlet - F.I.P. Threads
- Sizes - 1/2", 1/2" x 3/4", 3/4", 3/4" x 1", 1", 1 1/4", 1 1/2", 2"
- **560BC** - 560B with 1/8" Test Plug
- Sizes - 3/4", 1", 1 1/4", 1 1/2", 2"
- All A.Y. McDonald 175 PSIG Gas Valves may be re-lubricated in the full open or the full closed position when the valve is pressurized or Un-pressurized. See page 9.
- **NOTE:** These valves are designed for use with natural, manufactured or LP gas only.
- DO NOT TAMPER WITH BOTTOM NUT

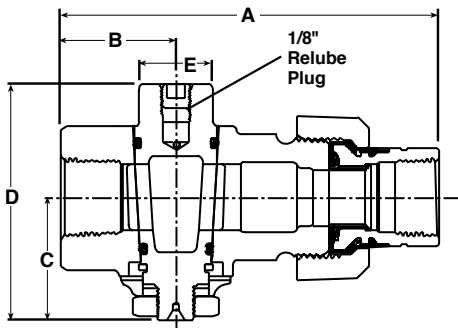

SIZE	A	B	C	D	E	WT lbs.
3/4	5 1/8	1 17/32	1 11/16	3 3/16	1	2.3
1	6 3/16	2 1/8	1 7/8	3 17/32	1 1/8	3.3
1 1/4	6 1/2	2 3/16	2 3/8	4 3/8	1 3/8	5.2
1 1/4 x 3/4	6 1/8	2 1/2	1 11/16	3 3/16	1	2.9

6366B & 6366G

TAMPERPROOF • 175 PSIG • FLAT HEAD

- **6366B** - Black Iron
- **6366G** - Zinc Coated with a Clear Chromate Finish Iron
- Brass Plug
- Inlet - F.I.P. Threads
- Outlet - Insulated Union with F.I.P. Threads Tailpiece
- Sizes - 3/4", 1", 1 1/4", 1 1/4" x 3/4"
- All A.Y. McDonald 175 PSIG Gas Valves may be re-lubricated in the full open or the full closed position when the valve is pressurized or Un-pressurized. See page 9.
- **NOTE:** These valves are designed for use with natural, manufactured or LP gas only.
- All A.Y. McDonald plug style gas valves have factory set turning torque.
- DO NOT TAMPER WITH BOTTOM NUT

NOTE: All dimensions shown are for reference only. Contact factory if specific dimensional values or tolerances are required.