



ACUDOR Products Inc.

(Address 1) 80 Little Falls Rd. Fairfield NJ 07004 USA
(Address 2) 4216 N. Pecos Rd, Ste. 104 Las Vegas, NV 89115
Tel : 800-722-0501 Fax : (973) 575-5160
www.acudor.com e-mail : info@acudor.com


FB-5015

FIRE RATED RECESSED FOR DRYWALL

QTY.	NOMINAL SIZE	A	B	C	D	E	F	LOCK
	12 x 12 (305 x 305)	11.83 (301)	11.83 (301)	14.50 (368)	14.50 (368)	12.17 (309)	12.06 (306)	1
	16 x 16 (406 x 406)	15.83 (403)	15.83 (403)	18.50 (470)	18.50 (470)	16.17 (411)	16.06 (408)	1
	18 x 18 (457 x 457)	17.83 (454)	17.83 (454)	20.50 (521)	20.50 (521)	18.17 (462)	18.06 (459)	1
	24 x 24 (610 x 610)	23.83 (606)	23.83 (606)	26.50 (673)	26.50 (673)	24.17 (614)	24.06 (611)	1
	24 x 36 (610 x 914)	35.83 (910)	23.83 (606)	26.50 (673)	38.50 (978)	24.17 (614)	36.06 (916)	2

WALLS

Meets 1-1/2 hour fire requirement in accordance with Underwriters Laboratories UL 10(b) and CAN/ULC S104 maximum size 24" width 36" Height

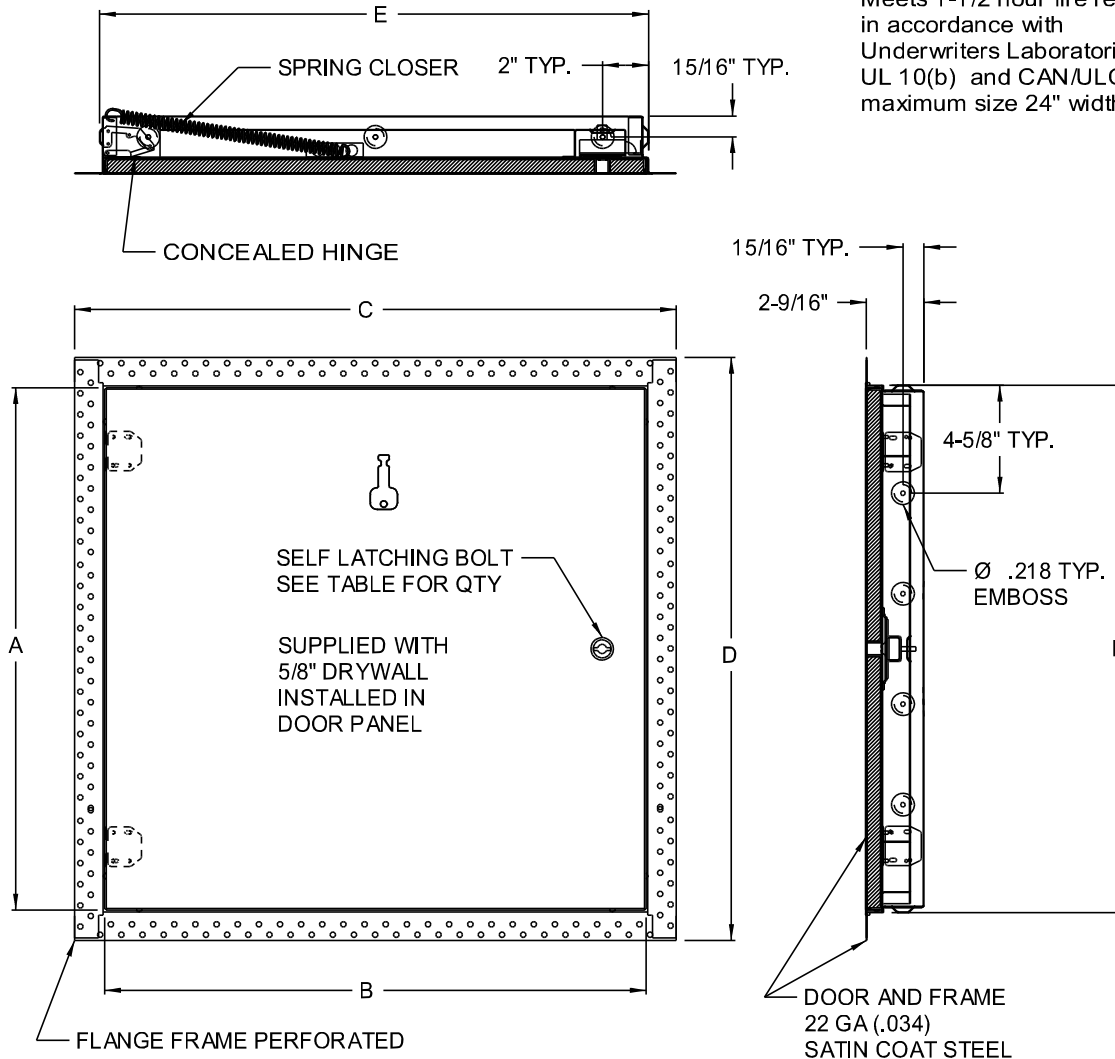

- STANDARD FEATURES:** SELF LATCHING BOLT- OPERATED BY FLUSH KEY AND INSIDE TURN RELEASE.
SUPPLIED WITH 5/8" DRYWALL INSTALLED IN DOOR PANEL
SATIN COAT STEEL, MILL FINISH
- OPTIONS:**
- LOCK TYPE
 RIM CYLINDER LOCK

ALL FIRE RATED:
SPECIAL SIZES CAN BE ORDERED, BUT BASIC CONSTRUCTION MUST REMAIN CONSISTENT TO COMPLY WITH UL AND ULC REGULATIONS.

JOB NAME:
CUSTOMER:

APPROVED BY:
DATE: