



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors, and roofs



RECESSED ACCESS DOOR FOR CEILINGS

GFRG-S

GLASS FIBER REINFORCED GYPSUM
SQUARE CORNER

APPLICATION

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings

PRODUCT FEATURES




- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

GFRG ACCESS DOOR SPECIFICATIONS:

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

STANDARD SIZES (Special sizes available upon request)

DOOR SIZE Inches (mm)	CEILING OPENING Inches (mm)	WEIGHT LBS (kg)
9 x 9 (229 x 229)	15 x 15 (381 x 381)	6.0 (2.73)
12 x 12 (305 x 305)	18 x 18 (457 x 457)	9.0 (4.09)
16 x 16 (406 x 406)	22 x 22 (559 x 559)	10.0 (4.53)
18 x 18 (457 x 457)	24 x 24 (610 x 610)	11.0 (5.0)
24 x 24 (610 x 610)	30 x 30 (762 x 762)	16.0 (7.27)

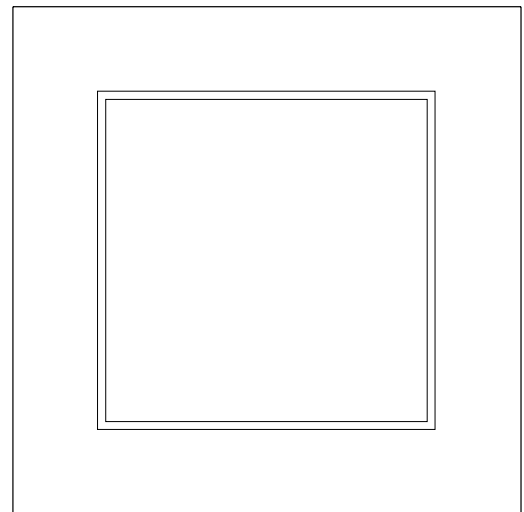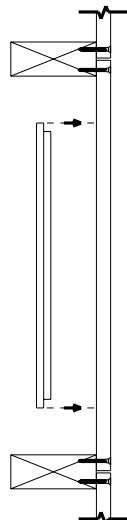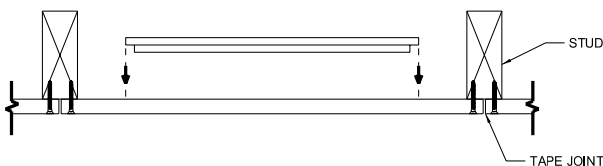

For more information on Acudor Products Inc. visit www.acudor.com or call 800.722.0501

Product specifications may change without notice. Acudor is a registered Trade Mark ©2014