



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors, and roofs



DUCT DOORS for Ductboard/Fiberglass ducts

HD-5070-F

Application

- Provides easy access to ductboard/fiberglass ducts

Product Features

- Trim flange has adhesive bonded gasket for surface mounting to duct
- Hinged, insulated door panel with gasketing
- These doors are designed for use in low to medium pressure up to 3" static W.G.

Options:

- ALUMINUM
- STAINLESS STEEL
- CYLINDER LOCK & KEY
- HASP & STAPLE

HD-5070-F "Hinged" Fibreglass Duct Doors Specifications:

Door: 24 gauge galvanized steel


Frame: 24 gauge galvanized steel

Hinge: Continuous aluminum piano hinge

Insulation: Insulation 1" Micro-AIRC M/F TYPE-475 R value 7.7

Gasketing: 1/8" thick by 1/2" wide closed cell neoprene gasketing between door and frame and 1/16" thick by 1 1/2" adhesive bonded gasket between frame to duct

Latch: Self tightening, hand operated cam latches

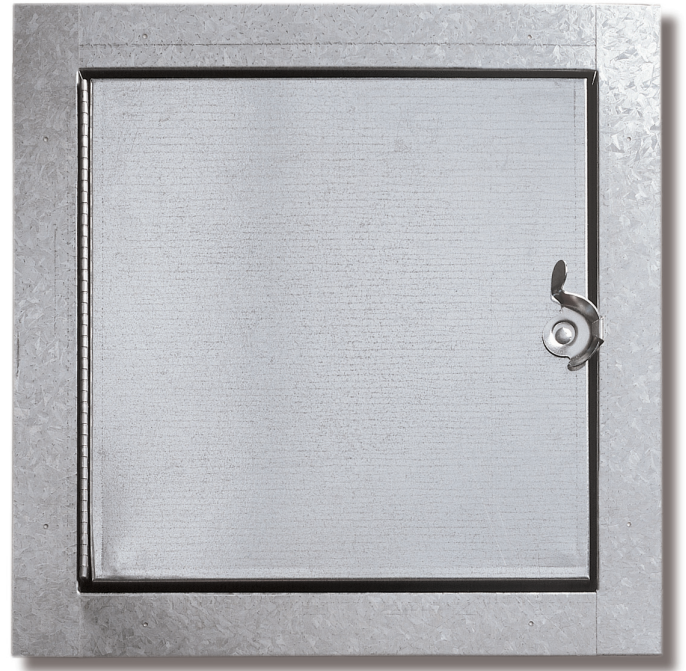

STANDARD SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H			WEIGHT PER DOOR		
inches	mm	No. latches	lbs.	kg.	
6 X 6	150 X 150	1	1.0	0.5	
8 X 8	200 X 200	1	1.25	0.6	
10 X 10	250 X 250	1	2.0	0.9	
12 X 12	300 X 300	1	2.5	1.1	
14 X 14	350 X 350	2	3.25	1.5	
16 X 16	400 X 400	2	4.0	1.8	
18 X 18	450 X 450	2	5.5	2.5	
24 x 24	609 X 609	2	12.0	5.4	

Duct opening is the same size as the NOMINAL SIZE.
For detailed specifications see submittal sheet.

