

Project: _____

Architect: _____

Contractor: _____



Supplier: _____

Dealer: _____

Engineer: _____

Location: _____

Date: _____

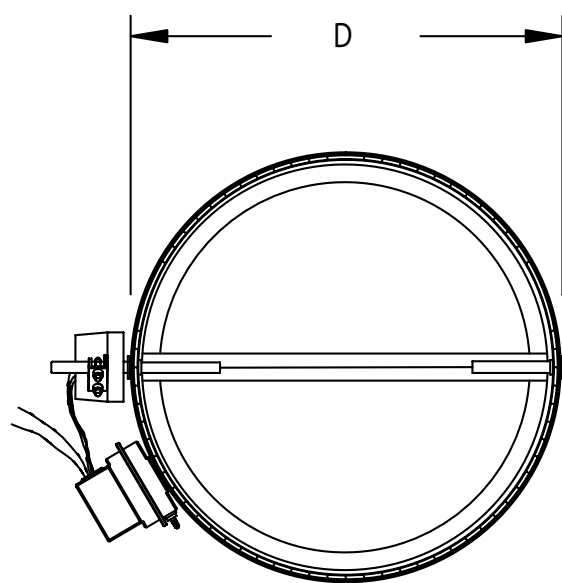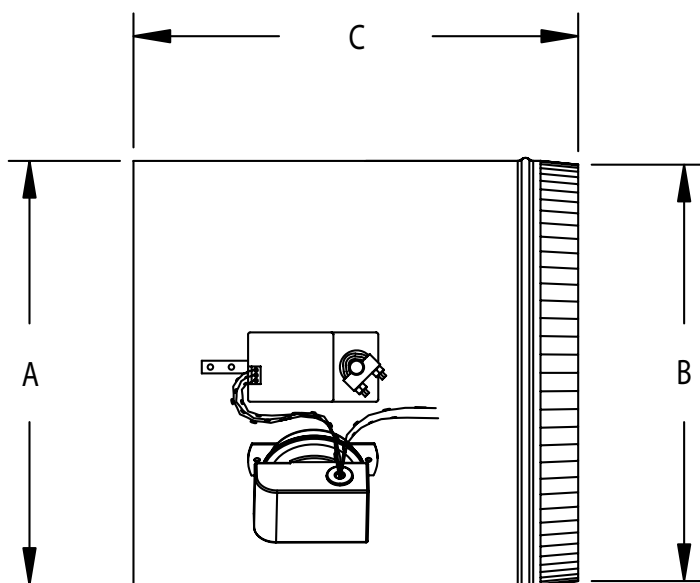

Model	A	B	C	D	Shipping Weight
6210	10.13" (257 mm)	9.8" (249 mm)	10" (254 mm)	14" (356 mm)	8 lbs
6212	12.13" (308 mm)	11.8" (300 mm)	12" (305 mm)	16" (406 mm)	10 lbs
6214	14.13" (359 mm)	13.8" (351 mm)	14" (356 mm)	18" (457 mm)	12 lbs
6216	16.13" (410 mm)	15.8" (401 mm)	16" (406 mm)	20" (508 mm)	14 lbs
6218	18.13" (461 mm)	17.8" (452 mm)	18" (457 mm)	22" (559 mm)	16 lbs
6220	20.13" (511 mm)	19.0" (483 mm)	20" (508 mm)	24" (610 mm)	24 lbs

NOTES:

Applications: Compatible with the Aprilaire® Zoned Comfort Control system. Dampers are designed to relieve excess system pressure by maintaining the system static pressure based on a field adjustable static pressure switch.

Electrical Ratings: Power-closed/power-open actuator; 24 VAC 2W, 60Hz, 3VA, with time delay feature to allow actuator to perform a 30 second delay before beginning to close.

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current. Research Products reserves the right to make product changes without notification or obligation.