




Recessed Cover Kits With Two Receptacles for New Concrete

No low voltage outlets in these covers. Installs easily into our 5.5" round concrete box (see page P-9).

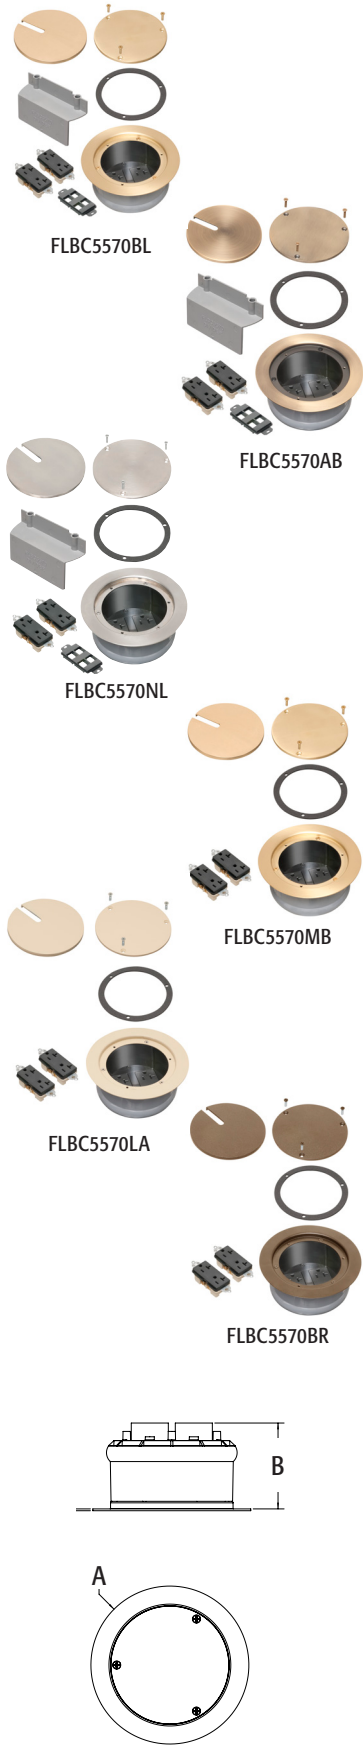

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG
PLATED ZINC COVER, STEEL FLANGE				
FLBC5570AB	21172	Antique Bronze	1	1
FLBC5570MB	21176	Brass	1	1
FLBC5570NL	21177	Nickel	1	1
POWDER COATED ZINC COVER, STEEL FLANGE				
FLBC5570BL	21173	Black	1	1
FLBC5570BR	21174	Brown	1	1
FLBC5570LA	21175	Light Almond	1	1



FEATURES AND BENEFITS	KITS INCLUDE
<ul style="list-style-type: none"> • Ultra thin flange and recessed devices reduce trip hazard caused by protruding plugs • Six finishes/colors die-cast zinc cover, steel flange PLATED in brass, nickel, and antique bronze OR POWDER COATED die-cast zinc cover in black, brown, and light almond 	<p>(1) Slotted cover, (1) leveling ring assembly with flange, (1) blank cover with gasket, (2) 20A tamper resistant decorator style duplex receptacles, (6) #8-32 x 5/8" long screws, (4) #6-32 x 3/4" long screws. Plated covers also come with (1) low voltage divider and (1) 4-port keystone device!</p>

INSTALLATION INSTRUCTIONS

<p>If using low voltage dividers cut off same amount as you cut off the box. (See instructions with product to install blank inserts into keystone holders.)</p>	<p>Wire receptacle and or low voltage devices. Seal underside of flange with silicone sealant if desired (not included).</p>	<p>After installing flooring, secure leveling ring assembly to floor with PVC cement applied around flange.</p>	<p>Cover options: Install gasket and blank with #8-32 x 5/8" screws or install in use cover (no screws required).</p>