




LPCG50


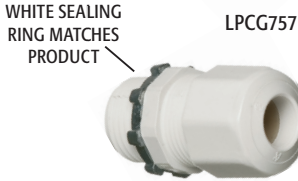


LPCG757

WHITE SEALING RING MATCHES PRODUCT



LPCG50W

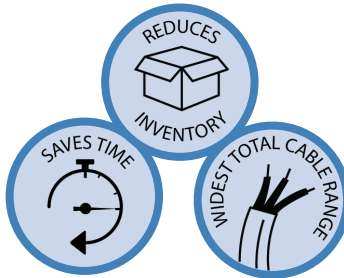

Non-Metallic Low Profile Strain Relief Cord Connectors

Non-Metic. Liquid tight. Oil tight. Furnished with sealing ring and locknut.


Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid tight seal when installing in non-threaded openings.

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | TRADE SIZE | CORD RANGE | UNIT PKG | STD PKG | DIM A | DIM B | DIM C |
|----------------|--------------------------|------------|--|----------|---------|-------|-------|-------|
| LPCG503* | 50350 | 1/2 | .100 - .360 | 25 | 100 | 1.792 | .595 | .978 |
| LPCG50* | 80086 | 1/2 | .200 - .485 | 25 | 100 | 1.792 | .595 | .978 |
| LPCG507 | 50354 | 1/2 | .385 - .750 | 25 | 100 | 2.250 | .595 | 1.230 |
| LPCG753* | 50760 | 3/4 | .100 - .360 | 10 | 50 | 1.963 | .595 | .978 |
| LPCG754 | 50762 | 3/4 | .200 - .485 | 10 | 50 | 1.963 | .595 | .978 |
| LPCG757 | 36100 | 3/4 | Grommet A - .385 to .600 Grommet B - .600 to .750 | 10 | 50 | 2.250 | .595 | 1.230 |



MADE IN USA.

*UL not applicable for cords under .200" diameter, wire strength will not meet UL 35 lb test requirements for the fitting. When ordering black, add suffix "BL" to catalog number. When ordering white, add suffix "W" to catalog number.

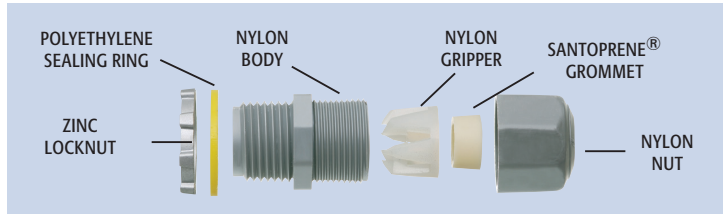

Scan for Video

