

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## B1-\*\*DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression Inlet

**Use:** For use in potable water distribution systems in accessible locations only

**Design Features:**


- **Superior corrosion resistance** to harsh chemicals found in common household cleaning and plumbing repair products
- **More flexible than stainless steel**, the braided polymer-coated fibers bend freely without kinking or crimping
- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections
- **100% Compliant** to California and Vermont “low-lead” requirements



**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F  
**Pressure:** 125 psi maximum

**Tubing Diameter:** 0.300” I.D. (0.550” O.D.)

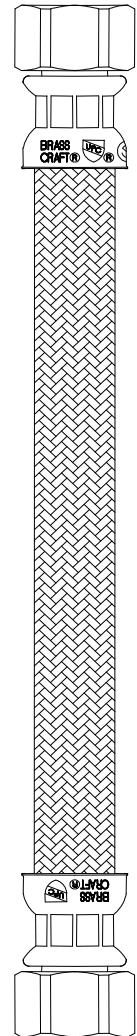

<b>MATERIAL SPECIFICATIONS</b>	
<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	PVC coated polyester yarn
<b>Barb</b>	Compliant brass
<b>Ferrule</b>	Zinc plated 1008 steel
<b>Nut</b>	C36000 brass
<b>Washer</b>	Nitrile rubber
<b>Compression Ring &amp; Nut</b>	C36000 brass

**Part Listing:**

- B1-12DW F            3/8” Compression x 3/8” Compression x 12” Length
- B1-16DW F            3/8” Compression x 3/8” Compression x 16” Length
- B1-20DW F            3/8” Compression x 3/8” Compression x 20” Length
- B1-36DW F            3/8” Compression x 3/8” Compression x 36” Length
- B1-48DW F            3/8” Compression x 3/8” Compression x 48” Length


*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*



# B1-\*\*DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

**Part Listing (con't):**

- B1-48DW6 D      3/8" Compression x 3/8" Compression w/ 3/8" M.I.P. Elbow x 48" Length, carded
- B1-48DW6U D      Universal Connector - 3/8" Compression x 3/8" Compression x 48" Length  
with 3/8" M.I.P. elbow, 1/2" Compression & 1/2" F.I.P. adapters, carded
- B1-60DW F      3/8" Compression x 3/8" Compression x 60" Length
- B1-60DW B      3/8" Compression x 3/8" Compression x 60" Length, bulk
- B1-60DW6 D      3/8" Compression x 3/8" Compression w/ 3/8" M.I.P. Elbow x 60" Length, carded
- B1-72DW F      3/8" Compression x 3/8" Compression x 72" Length
- B1-72DW6 D      3/8" Compression x 3/8" Compression w/ 3/8" M.I.P. Elbow x 72" Length, carded
- B1-120DW F      3/8" Compression x 3/8" Compression x 120" Length

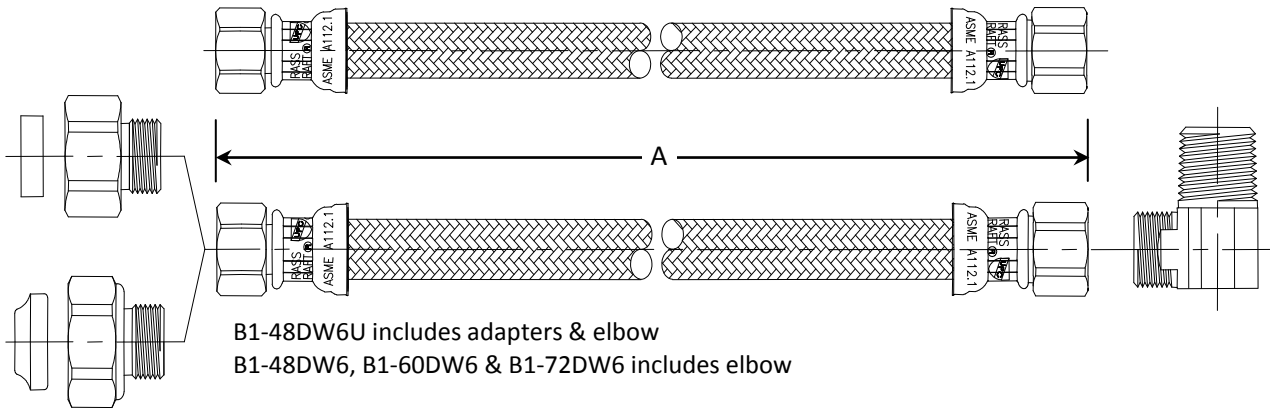

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-12DW	12.0 / 13.0
B1-16DW	16.0 / 17.0
B1-20DW	20.0 / 21.0
B1-36DW	36.0 / 37.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-48DW	48.0 / 49.0
B1-48DW6	48.0 / 49.0
B1-48DW6U	48.0 / 49.0
B1-60DW	60.0 / 61.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-60DW6	60.0 / 61.0
B1-72DW	72.0 / 73.0
B1-72DW6	72.0 / 73.0
B1-120DW	120.0 / 121.0

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to AB1953 (Project # 2174785)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**