

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B8-**A Speedi Plumb[®] PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only


Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

Operating Specifications:

Temperature: 40° - 140° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

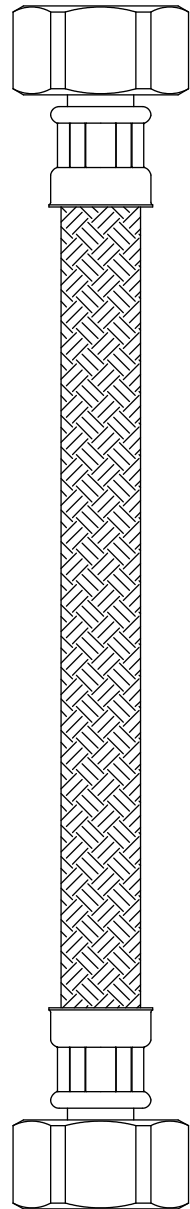

MATERIAL SPECIFICATIONS

Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Zinc-plated steel
Nut	Brass, chrome plated
Washer	Rubber

Part Listing:


- B8-12A F 1/2" FIP* x 1/2" FIP* x 12" length
- B8-16A F 1/2" FIP* x 1/2" FIP* x 16" length
- B8-20A F 1/2" FIP* x 1/2" FIP* x 20" length
- B8-24A F 1/2" FIP* x 1/2" FIP* x 24" length
- B8-30A F ** 1/2" FIP* x 1/2" FIP* x 30" length
- B8-36A F 1/2" FIP* x 1/2" FIP* x 36" length

*1/2" FIP also fits 7/16" rubber slip nut
 ** DMA N/A

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

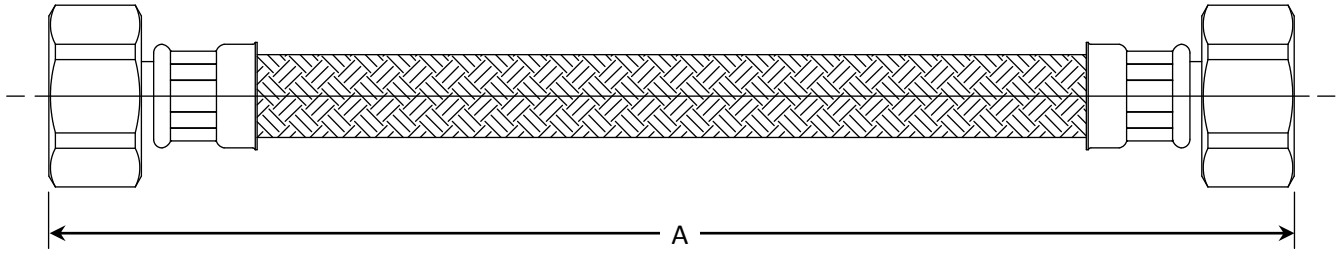

PART DIMENSIONS (Inches)	
Model	DIM. A
B8-12A	12.0 / 13.0
B8-16A	16.0 / 17.0
B8-20A	20.0 / 21.0
B8-24A	24.0 / 25.0
B8-30A	30.0 / 31.0
B8-36A	36.0 / 37.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

400.101 B8 SPP Braided Faucet Connector - FIP Inlet REV 03/14

BrassCraft®

© 2013 BrassCraft Mfg.