


TYPE KLU

SCRULUG™



Copper Cable with Offset Tongue; Non-Plated

High copper alloy terminal with offset tongue for joining a wide range of cable to equipment pads or bar. Easy to install with screwdriver or wrench. Connector is reusable. Plain copper finish.

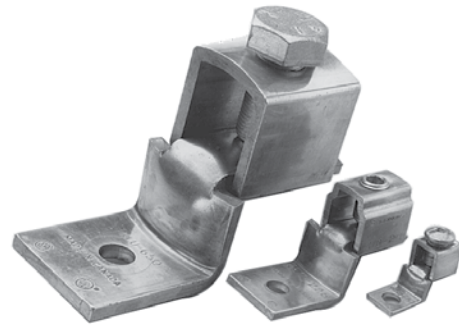

Features & Benefits

- Convenient range-taking design reduces catalog numbers required in inventory; one connector accommodates several conductor sizes
- High conductivity copper alloy for long lasting reliable contact
- Compact design, easy to install, reduces labor time
- Slot Robertson screw, hex head, hex socket bolt require no special installation tools and eliminates over-torquing and potential conductor damage




Fig. 1




Fig. 2




Fig. 3

① Catalog Number	Conductor	Fig. No.	B (MM/IN)	C (MM/IN)	K (MM/IN)	L (MM/IN)	N (MM/IN)	T (MM/IN)	Rec. Tightening Torque (in-lb)	Hardware	Stud Hole Size	Strip Length (in)
KLU25	14 Sol. .064 Dia. to 10 Sol. .102 Dia. CU	3	7.00 0.28	8.00 0.31	4.00 0.14	26.0 1.02	5.00 0.21	2.00 0.07	20	No. 8-32 Slotted Round Machine Screw	#6	7/16
KLU25TP												
KLU35	14 Sol. .0641 Dia. to 6 Str. .184 Dia. CU	2	11.0 0.43	10.0 0.39	5.00 0.20	31.0 1.24	6.00 0.22	2.00 0.07	35	1/4 UNF Slotted Set Screw	#10	5/8
KLU35TP												
KLU70	8 Sol. .129 Dia. to 2 Str. .292 Dia. CU	2	13.0 0.50	12.0 0.47	7.00 0.26	39.0 1.55	6.00 0.25	2.00 0.08	40	5/16 UNF Slotted Set Screw	1/4	3/4
KLU70TP												
KLU125	2 Str. .292 Dia. to 1/0 Str. .372 Dia. CU	2	15.0 0.61	16.0 0.62	7.00 0.26	50.0 1.98	11.0 0.42	3.00 0.11	50	3/8 UNF Slotted Set Screw	1/4	15/16
KLU125TP												
KLU175	4 Str. .232 Dia. to 3/0 Str. .470 Dia. CU	1	18.0 0.72	19.0 0.75	10.0 0.39	56.0 2.20	11.0 0.43	4.00 0.16	250	3/8 UNF Socket/Hex Screw	3/8	1
KLU175TP												
KLU225	2 Str. .292 Dia. to 4/0 Str. .528 Dia. CU	1	24.0 0.94	25.0 0.99	9.00 0.34	65.0 2.55	13.0 0.51	3.00 0.12	250	7/16 UNF Socket/Hex Screw	5/16	1-5/16
KLU225TP												
KLU300	1/0 Str. .372 Dia. to 350 kcmil .681 Dia. CU	1	31.0 1.22	25.0 0.99	10.0 0.39	72.0 2.83	13.0 0.52	3.00 0.12	325	5/8 UNF Socket/Hex Screw	3/8	1-5/8
KLU300TP												
KLU400	1/0 Str. .372 Dia. to 500 kcmil .813 Dia. CU	1	36.0 1.42	38.0 1.50	10.0 0.39	104.0 4.09	23.0 0.91	5.00 0.18	375	5/8 UNF Socket/Hex Screw	3/8	1-5/32
KLU400TP												

NOTES:

① Suffix "-TP" on catalog number denotes tin plate (example: KLU400TP).

2 Material: Copper alloy.