

TYPES YAV-2TC, YA-2LN, YA-L-2TC-

HYLUG™

Uninsulated Copper Compression Terminal
UL Listed 90° C, Up to 35 kV ♦


45° and 90° angles available. Please contact Customer Service to order:
1-800-346-4175

Features & Benefits



- Inspection window allows for visual verification that the wire has been fully inserted prior to crimping the lug
- Barrel is designed with an internal chamfer at the wire entry to ensure smooth insertion of the wire, preventing possible damaging of the strands
- Short/Standard length barrel is recommended for installations with limited space requirements
- Two hole tongue/tang is recommended when space permits as the 2-hole feature minimizes the terminations from loosening or rotating under vibration, movement, or heat cycling
- 45° and 90° angular lugs are available; please contact Customer Service
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding
- BURNDY certifies its products using the BURNDY Engineered System and select other crimp tool manufacturers in accordance with one or more of the UL categories in order to obtain a UL Listing
- Terminals and splices accommodating code wire: Accommodates Code Class B (Concentric, Compressed, Compact) and Class C wire

Accessories

- Hardware - Section F
- PENETROX™ Oxide Inhibitor - Section F
- Heat and Cold Shrink Tubing - Section D
- WIREMIKE™ Wire Micrometer - Section F
- Wire Management (Cable Ties) - Section G

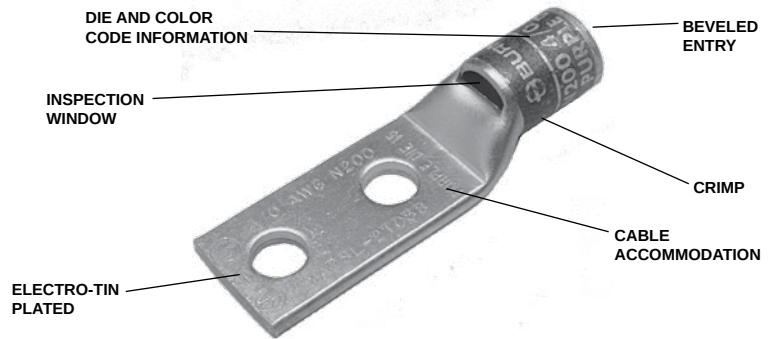


NOTE: Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.

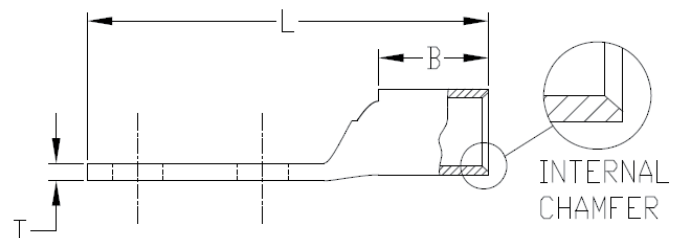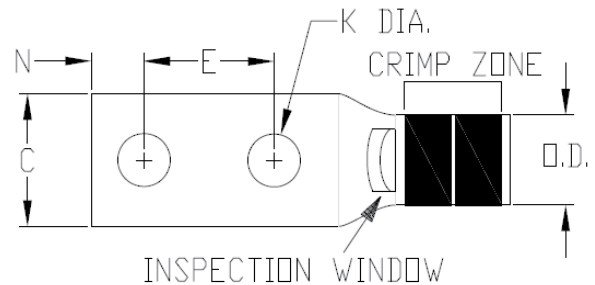

Compression Connections

Copper Compression — Terminal — Code — Two Hole
Standard Barrel — with Inspection Window

TYPES YAV-2TC, YA-2LN, YA-L-2TC- (Continued)

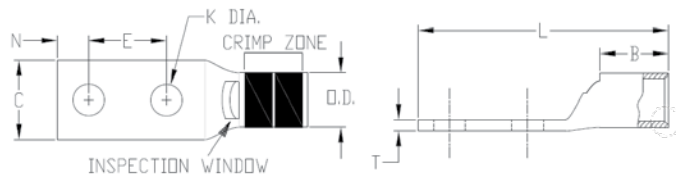

▲ See Copper Code Standard Barrel Terminal Tooling Tables in this section for complete tool and die listing information.

Catalog Number	Conductor			Color Code	Die Index	Stud Size	Figure Dimensions								Wire Strip Length
	Code	Flex	Metric MM ² ***				Stud Hole Diameter (K)	Outside Diameter (OD)	Barrel Length (B)	Pad Width (C)	Overall Length (L)	Hole Spacing (E & F)	Hole Offset (N)	Pad Thickness (T)	
YA26L2TC14	2/0 AWG	—	70	Black	13	1/4	0.27	0.56	0.94	0.83	2.64	5/8	0.31	0.12	1
YA26L2TC14E2						1/4	0.27	0.56	0.94	0.83	2.76	3/4	0.31	0.12	
YA26L2TC14E1						1/4	0.27	0.56	0.94	0.83	3.01	1	0.31	0.12	
YA262L						5/16	0.33	0.56	0.94	0.83	2.95	7/8	0.34	0.12	
YA26L2TC38						3/8	0.40	0.56	0.94	0.83	3.20	1	0.41	0.12	
YA262LN						1/2	0.56	0.56	0.94	0.83	4.39	1-3/4	0.63	0.12	
YA27L2TC14E2	3/0 AWG	—	—	Orange	14	1/4	0.27	0.62	1.00	1.00	2.86	3/4	0.31	0.12	1-1/16
YA27L2TC38						3/8	0.41	0.62	1.00	1.00	3.30	1	0.41	0.12	
YA272LN						1/2	0.56	0.62	1.00	0.91	4.48	1-3/4	0.63	0.13	
YA28L2TC14E2	4/0 AWG	—	—	PURPLE	15	1/4	0.27	0.69	0.88	1.02	2.78	3/4	0.31	0.14	1-1/8
YA28L2TC14E1						1/4	0.27	0.69	0.88	1.02	3.03	1	0.31	0.14	
YA28L2NTC516						5/16	0.33	0.69	0.88	1.02	3.84	1-3/4	0.34	0.14	
YA28L2TC38E2						3/8	0.41	0.69	0.88	1.02	2.97	3/4	0.41	0.14	
YA28L2TC38						3/8	0.41	0.69	0.88	1.02	3.22	1	0.41	0.14	
YA282LN						1/2	0.56	0.69	0.88	1.02	4.41	1-3/4	0.63	0.14	
YA29L2TC38	250 kcmil	—	—	Yellow	16	3/8	0.41	0.75	1.06	1.10	3.43	1	0.41	0.16	1-1/8
YA292LN						1/2	0.56	0.75	1.06	1.10	4.62	1-3/4"	0.63	0.16	
YA30L2TC38	300 kcmil	—	150	White	17 or 298	3/8	0.41	0.81	1.03	1.20	3.45	1	0.41	0.16	1
YA302LN						1/2	0.56	0.81	1.03	1.20	4.63	1-3/4	0.63	0.16	
YA31L2TC14E2	350 kcmil	—	185	Red	18 or 324	1/4	0.27	0.88	1.06	1.29	3.07	3/4	0.31	0.18	1-1/8
YA31L2NTC516						5/16	0.33	0.88	1.06	1.29	4.13	1-3/4	0.34	0.18	
YA31L2TC38						3/8	0.40	0.88	1.06	1.29	3.51	1	0.41	0.18	
YA31L2TC12						1/2	0.52	0.88	1.06	1.29	4.01	1-1/4	0.53	0.18	
YA312LN						1/2	0.56	0.88	1.06	1.29	4.70	1-3/4	0.62	0.18	
YA322L	400 kcmil	—	—	Blue	19 or 470	3/8	0.40	0.95	1.19	1.40	3.75	1	0.41	0.19	1-1/4
YA32L2TC38						3/8	0.40	0.95	1.19	1.40	3.69	1	0.41	0.19	
YA32L2TC38E5						3/8	0.40	0.95	1.19	1.40	3.75	1-1/16	0.41	0.19	
YA322LN						1/2	0.56	0.95	1.19	1.40	4.88	1-3/4	0.63	0.19	

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor

◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions

Notes: All dimensions shown are for reference only.

Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.