


| BURNDY<br>CATALOG<br>NUMBER |  | COPPER<br>AIRCRAFT<br>CABLE<br>MIL-W-5036 | MS26059<br>DASH<br>NO. | STUD<br>SIZE | C ±.020      | D MIN.        | L MAX.      | N ±.010     | O.D.<br>±.015 | T ±.015      | B MIN. | TOOL<br>INDEX<br>NUMBER |              |
|-----------------------------|-----------------------------------------------------------------------------------|-------------------------------------------|------------------------|--------------|--------------|---------------|-------------|-------------|---------------|--------------|--------|-------------------------|--------------|
| YAV18T4                     | AN 22 - 18                                                                        | --                                        | 3-4                    | .188<br>[5]  | .256<br>[7]  | .618<br>[16]  | .093<br>[2] | .210<br>[5] | .051<br>[1]   | .210<br>[5]  | 1      |                         |              |
| YAV18L33                    |                                                                                   | --                                        | 4-6                    | .250<br>[6]  | .310<br>[8]  | .600<br>[15]  | .125<br>[3] |             |               |              |        | .040<br>[1]             |              |
| YAV18T5                     |                                                                                   | --                                        | 4-6                    | .316<br>[8]  | .404<br>[10] | .760<br>[19]  | .156<br>[4] |             |               |              |        |                         | .032<br>[1]  |
| YAV18T1                     |                                                                                   | --                                        | 6-8                    |              |              |               |             |             |               |              |        |                         |              |
| YAV18                       |                                                                                   | --                                        | 8-10                   |              |              |               |             |             |               |              |        |                         |              |
| YAV14T5                     | AN 16 - 14                                                                        | --                                        | 4-6                    | .300<br>[8]  | .404<br>[10] | .783<br>[20]  | .156<br>[4] | .156<br>[4] | .042<br>[1]   | .250<br>[6]  | 2      |                         |              |
| YAV14T1                     |                                                                                   | --                                        | 6-8                    |              |              |               |             |             |               |              |        |                         |              |
| YAV14                       |                                                                                   | --                                        | 8-10                   |              |              |               |             |             |               |              |        |                         |              |
| YAV14T2                     |                                                                                   | --                                        | 1/4                    | .422<br>[11] | .576<br>[15] | .985<br>[25]  | .250<br>[6] |             | .031<br>[1]   |              |        |                         |              |
| YAV14T3                     |                                                                                   | --                                        | 5/16                   | .438<br>[11] |              |               |             |             |               |              |        |                         |              |
| YAV10T7                     | AN 12 - 10                                                                        | 165                                       | 4-6                    | .298<br>[8]  | .405<br>[10] | .930<br>[24]  | .156<br>[4] | .210<br>[5] | .070<br>[2]   | .392<br>[10] | 4      |                         |              |
| YAV10T11                    |                                                                                   | --                                        | 6-8                    | .380<br>[10] | .450<br>[11] | .971<br>[25]  | .188<br>[5] |             | .060<br>[2]   | .402<br>[10] |        |                         |              |
| YAV10                       |                                                                                   | 102                                       | 8-10                   |              |              |               |             |             |               |              |        |                         |              |
| YAV10L36                    |                                                                                   | --                                        | 8-10                   | .290<br>[7]  | .343<br>[9]  | .860<br>[22]  | .156<br>[4] |             |               |              |        | .070<br>[2]             | .395<br>[10] |
| YAV10T3                     |                                                                                   | --                                        | 1/4                    | .469<br>[12] | .574<br>[15] | 1.093<br>[28] | .234<br>[6] |             | .050<br>[1]   | .392<br>[10] |        |                         |              |
| YAV10T2                     |                                                                                   | 106                                       | 5/16                   | .532<br>[14] | .606<br>[15] | 1.126<br>[29] | .266<br>[7] |             | .040<br>[1]   |              |        | .451<br>[11]            |              |
| YAV10T4                     |                                                                                   | 128                                       | 3/8                    | .558<br>[14] | .654<br>[17] | 1.174<br>[30] | .281<br>[7] |             |               |              |        |                         |              |

**NOTES:**

1. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
2. MATERIAL: SEAMLESS COPPER TUBING
3. FINISH: TIN PLATED
4. AVAILABLE WITH SILVER PLATING (ADD SUFFIX "SV") OR NICKEL PLATING (ADD SUFFIX "NK").

5. TYPICAL TONGUE MARKING

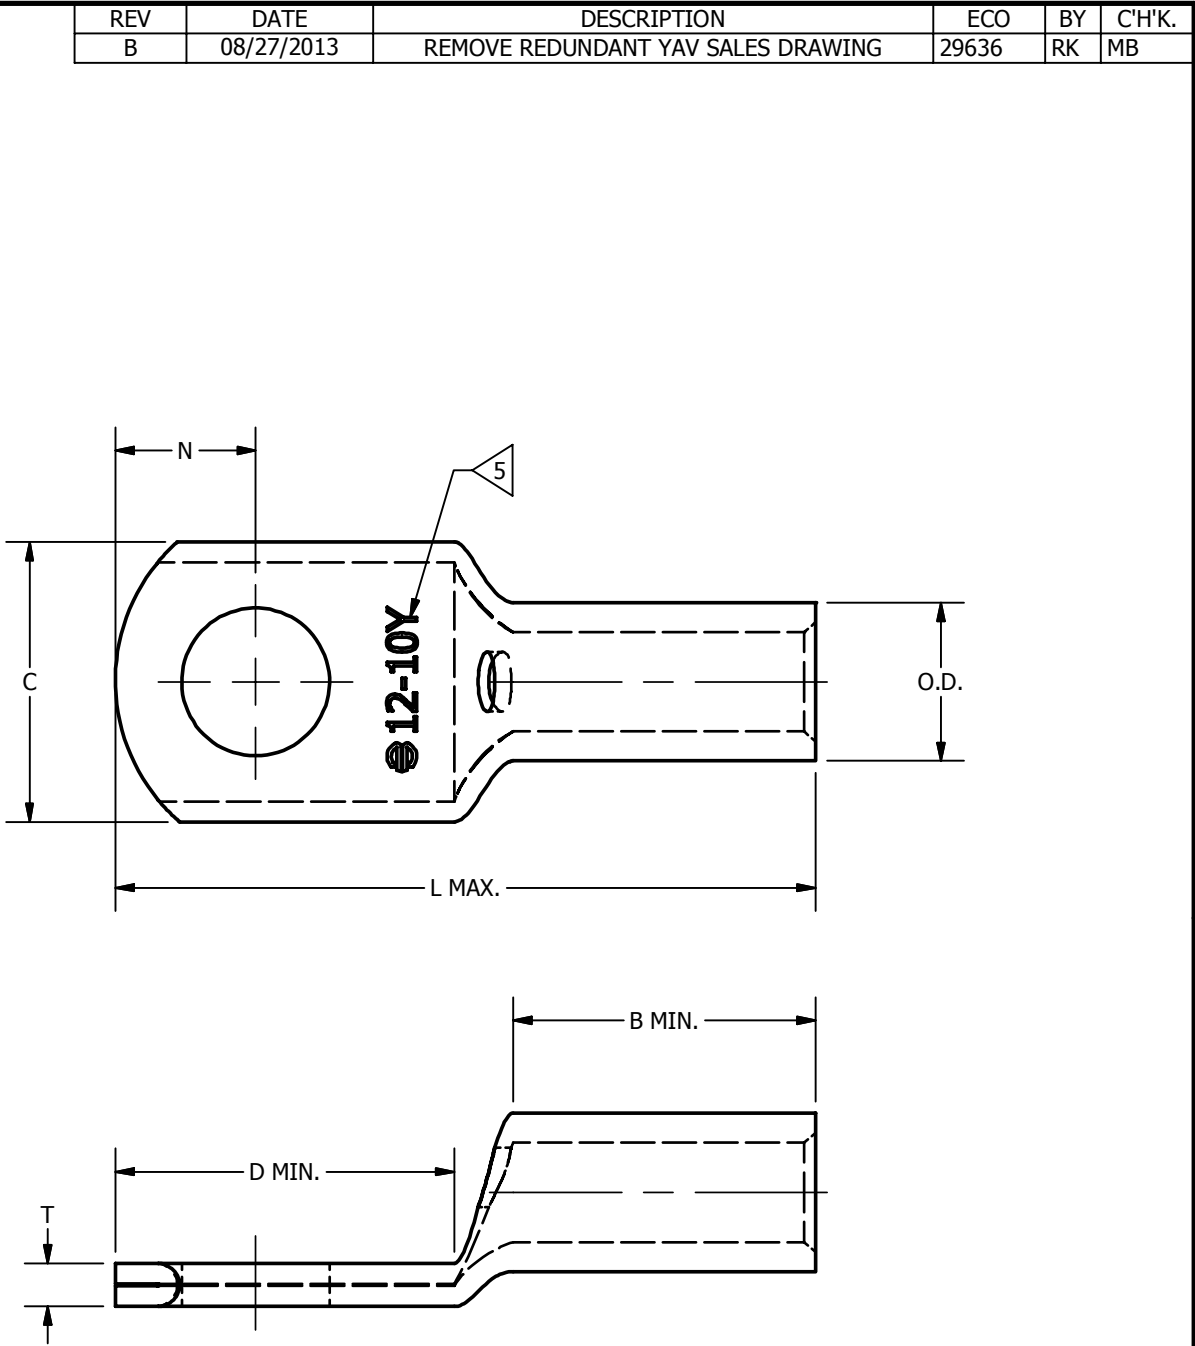

| REV | DATE       | DESCRIPTION                        | ECO   | BY | CHK. |
|-----|------------|------------------------------------|-------|----|------|
| B   | 08/27/2013 | REMOVE REDUNDANT YAV SALES DRAWING | 29636 | RK | MB   |

|                                                                             |  |                                 |              |
|-----------------------------------------------------------------------------|--|---------------------------------|--------------|
| TO ORDER BURNDY® PRODUCTS CALL                                              |  | HYLUG™ (MULTI. PEEP HOLE)       |              |
| UNITED STATES                                                               |  | ITEM NO: SEE TABLE              |              |
| 1-800-346-4175 (LONDONDERRY, NH)                                            |  | CAT. NO: YAV-- (SEE TABLE)      |              |
| CANADA:                                                                     |  | DRAWN BY: E.MARTIN 07/02/2013   |              |
| 1-800-361-6975 (QUEBEC)                                                     |  | CHECKER: E.MARTIN 07/03/2013    |              |
| 1-800-387-6487 (ALL OTHER PROVINCES)                                        |  | DSN APRVL: E.MARTIN 07/03/2013  |              |
| FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a> |  | MFG APRVL: --                   |              |
|                                                                             |  | QA APRVL: C ACKERMAN 08/22/2013 |              |
|                                                                             |  | MKT APRVL: M BAILLY 07/04/2013  |              |
|                                                                             |  | PROD FAM: --                    |              |
|                                                                             |  | PROJECT #: --                   |              |
|                                                                             |  | DOCUMENT TYPE: SALES            |              |
|                                                                             |  | REL LEVEL: Released             |              |
|                                                                             |  | SIZE                            | DRAWING NO   |
|                                                                             |  | B                               | 30024543     |
|                                                                             |  |                                 | SHEET 1 OF 1 |
|                                                                             |  | REV                             | B            |