




3/4" PEX Crimp x Spin Closed Copper Manifold, w/ 1/2" PEX Crimp Outlets

Maximum Operating Temperature:

180°F (82°C) @ 125psi (8.6bar)

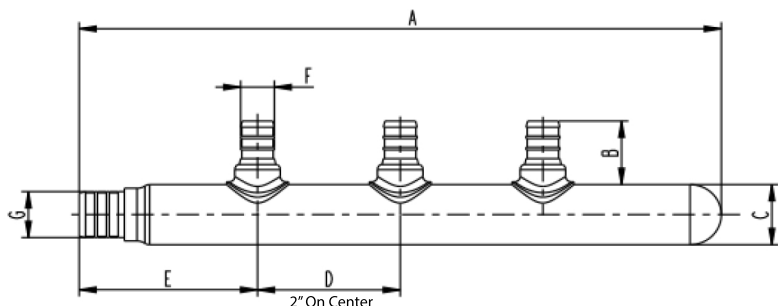

Item	SKU	Manifold Body	A	B	C	D	E	F	G	Outlets
1	CM3-75PXZ-PXO	1.122-1.127	8.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	3
2	CM4-75PXZ- PXO	1.122-1.127	10.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	4
3	CM5-75PXZ- PXO	1.122-1.127	12.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	5
4	CM6-75PXZ- PXO	1.122-1.127	14.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	6
5	CM7-75PXZ- PXO	1.122-1.127	16.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	7
6	CM8-75PXZ- PXO	1.122-1.127	18.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	8
7	CM9-75PXZ- PXO	1.122-1.127	20.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	9
8	CM10-75PXZ- PXO	1.122-1.127	22.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	10
9	CM12-75PXZ- PXO	1.122-1.127	26.5"	0.925"	CLOSED	2" OC	2.5"	1/2" PEX	3/4" PEX	12

Approvals:
ASTM: F877, F1807
NSF: 14, 61, 372
CSA: B137.5