


Push-Fit Manifold

3/4" Push-Fit x Closed Copper w/ 1/2" Push-Fit Outlets

FEATURES

- **Rated for Durability** - Able to withstand a maximum operating temperature of 180°F at 125 PSI
- **Fully Compliant** - Meets ASSE 1061 standards for push fittings
- **Lead Free** - Listed by NSF Standards 14, 61, and 372

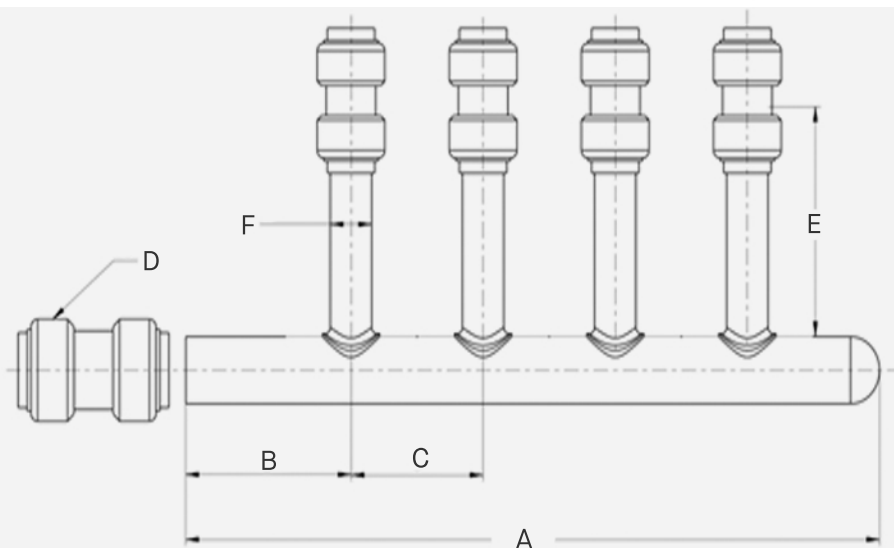

SKU	Branch	A	B	C/Revise	D	E	F
CM4-75PFZ-PF0	4	10.5"	2.5"	2"/3	3/4" push fit	1.5"	0.622"-0.626"
CM6-75PFZ-PF0	6	14.5"	2.5"	2"/5	3/4" push fit	1.5"	0.622"-0.626"