


# Copper Crimp Valveless Manifold

3/4 PEX Crimp w/ 1/2" PEX Crimp Outlets

## FEATURES

- **Rated for Durability** - Able to withstand a maximum operating temperature of 180°F at 125 PSI
- **Safe for Drinking Water** - Meets ASTM F877 and F-1807 standards for use in hot- and cold drinking water distribution systems
- **Lead Free** - Listed by NSF Standards 14, 61, and 372
- **Fully Compliant** - Complies with B137.5 CSA Standard for safe and effective use in commercial and residential jobs

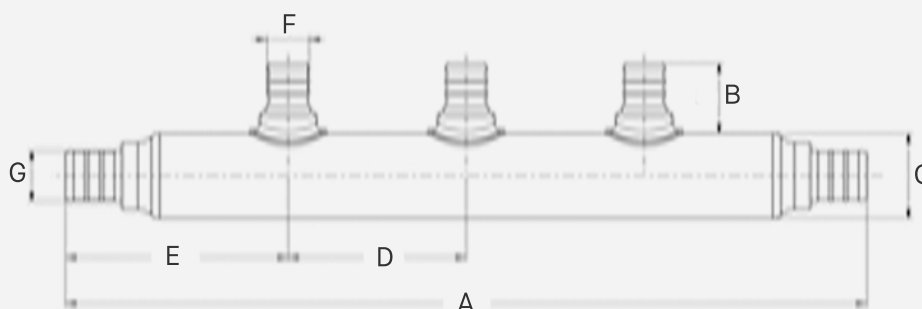

SKU	Branch	A	B	C/Revise	D	E	F	G
CM3-75PXA-PX0	3	9"	0.925"	OPEN (3/4" PEX)	2"/2	2.5"	1/2" PEX	3/4" PEX
CM4-75PXA-PX0	4	11"	0.925"	OPEN (3/4" PEX)	2"/3	2.5"	1/2" PEX	3/4" PEX
CM5-75PXA-PX0	5	13"	0.925"	OPEN (3/4" PEX)	2"/4	2.5"	1/2" PEX	3/4" PEX
CM6-75PXA-PX0	6	15"	0.925"	OPEN (3/4" PEX)	2"/5	2.5"	1/2" PEX	3/4" PEX
CM8-75PXA-PX0	8	19"	0.925"	OPEN (3/4" PEX)	2"/7	2.5"	1/2" PEX	3/4" PEX
CM12-75PXA-PX0	12	27"	0.925"	OPEN (3/4" PEX)	2"/11	2.5"	1/2" PEX	3/4" PEX