


Copper Crimp Valveless Manifold

PEX Crimp x PEX Crimp w/ 1/2" PEX Crimp Outlets

FEATURES

- **Rated for Durability** - Able to withstand a maximum operating temperature of 180°F at 125 PSI
- **Safe for Drinking Water** - Meets ASTM F877 and F-1807 standards for use in hot- and cold drinking water distribution systems
- **Lead Free** - Listed by NSF Standards 14, 61, and 372
- **Fully Compliant** - Complies with B137.5 CSA Standard for safe and effective use in commercial and residential jobs

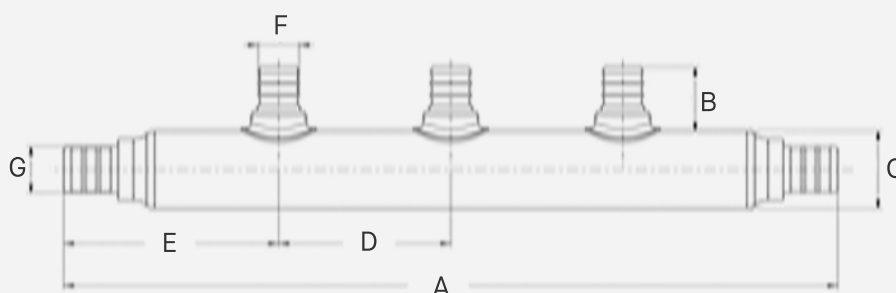

SKU	Branch	A	B	C	D/Revise	E	F	G
CM4-100PXA-PX0	4	11"	0.925"	1" PEX	2"/3	2.5"	1/2" PEX	1" PEX
CM6-100PXA-PX0	6	15"	0.925"	1" PEX	2"/5	2.5"	1/2" PEX	1" PEX
CM8-100PXA-PX0	8	19"	0.925"	1" PEX	2"/7	2.5"	1/2" PEX	1" PEX
CM12-100PXA-PX0	12	27"	0.925"	1" PEX	2"/11	2.5"	1/2" PEX	1" PEX