


CPVC x Female Stainless Steel Adapter

Lead Free

FEATURES

- **Versatile** - Rated at 100 PSI at 176°F for reliable performance with hot or cold water.
- **IAPMO UPC Certified** - for safe use on a wide-variety of residential and commercial projects.
- **Fully Compliant** – Complies with NSF/ANSI 14 and ASTM D2846 standards for CPVC.

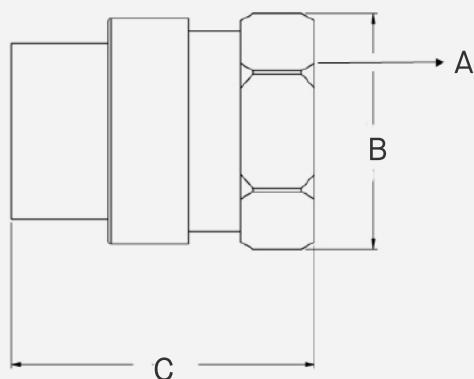

SKU	A	B	C
CVSLF050	1/2" FIP	1.13"	1.65"
CVSLF075	3/4" FIP	1.38"	1.87"
CVSLF100	1" FIP	1.68"	2.28"