


# CPVC x Male Stainless Steel Adapter

Lead Free

## FEATURES

- **Versatile** - Rated at 100 PSI at 176°F for reliable performance with hot or cold water.
- **IAPMO UPC Certified** - for safe use on a wide-variety of residential and commercial projects.
- **Fully Compliant** – Complies with NSF/ANSI 14 and ASTM D2846 standards for CPVC.

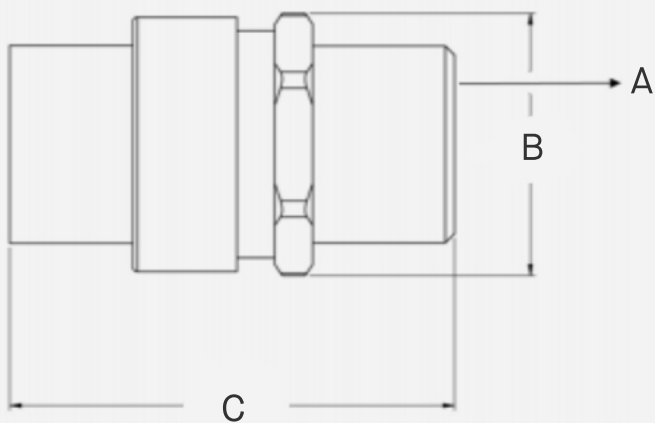

SKU	A	B	C
CVSLM050	1/2" MIP	1.13"	1.80"
CVSLM075	3/4" MIP	1.42"	2.26"
CVSLM100	1" MIP	1.68"	2.64"
CVSLM150	1-1/2" MIP	2.36"	3.31"
CVSLM200	2" MIP	2.91"	3.95"