

Galvanized Steel Dielectric Nipple


With Pex Insulator (Lead Free)

DESCRIPTION

These plastic-lined steel nipples act as an insulator to prevent destructive electrolytic corrosion between dissimilar metals. Their carbon steel construction and polypropylene lining offer exceptional corrosion resistance and make the nipple effective in both hot and cold water systems.

FEATURES

- Body: Carbon steel pipe to ASTM A-53 type E, zinc electroplated.
- Liner: Polypropylene (PP) plastic
- Dimensions: ASTM A733
- Thread: ASME B1.20.1
- Working Pressure: 300 PSI
- Temperature Range: 32°F to 230°F
- Meets NSF/ANSI 372 lead free requirement

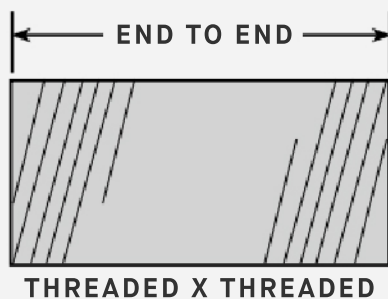

SKU	Size	Outside Diameter	End to End	Approximate Weight
DEN050-250	1/2" x 2-1/2"	0.840"	2-1/2"	0.15 lb
DEN050-300	1/2" x 3"	0.840"	3"	0.18 lb
DEN075-200	3/4" x 2"	1.050"	2"	0.15 lb
DEN075-250	3/4" x 2-1/2"	1.050"	2-1/2"	0.20 lb
DEN075-300	3/4" x 3"	1.050"	3"	0.24 lb
DEN075-400	3/4" x 4"	1.050"	4"	0.34 lb
DEN100-250	1" x 2-1/2"	1.315"	2-1/2"	0.27 lb
DEN100-300	1" x 3"	1.315"	3"	0.34 lb
DEN100-400	1" x 4"	1.315"	4"	0.48 lb
DEN125-400	1-1/4" x 4"	1.660"	4"	0.65 lb
DEN150-400	1-1/2" x 4"	1.900"	4"	0.78 lb
DEN200-400	2" x 4"	2.375"	4"	1.06 lb
DEN250-600	2-1/2" x 6"	2.875"	6"	2.47 lb
DEN300-600	3" x 6"	3.500"	6"	3.23 lb
DEN350-600	3-1/2" x 6"	4.000"	6"	3.90 lb
DEN400-600	4" x 6"	4.500"	6"	4.61 lb