


# Sweat x Female Dielectric Union

Lead Free

## FEATURES

- **Lead-Free** – Made out of forged brass alloy C6806 for excellent durability and safe use in drinking water systems
- **Built-in EPDM Gasket** - Makes the connector more resistant to abrasion and harsh chemicals
- **CH8A Steel** – Allows for a high-pressure tolerance of 500 PSI and a maximum temperature of 180°F
- **PA66 Plastic** - Has one of the highest melting points among commercially available plastics, and the added
- **30% Glass Fiber Reinforcement** - Allows for higher strength and rigidity

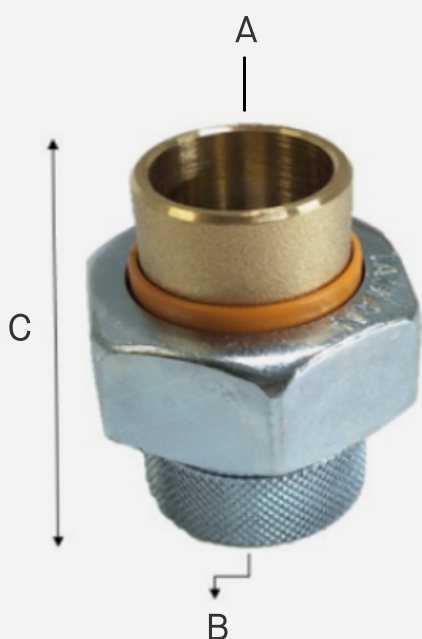

SKU	A	B	C
DEU050CF	1/2" Sweat	1/2" FIP	1.81"
DEU075CF	3/4" Sweat	3/4" FIP	2.07"
DEU100CF	1" Sweat	1" FIP	2.24"
DEU125CF	1-1/4" Sweat	1-1/4" FIP	2.47"
DEU150CF	1-1/2" Sweat	1-1/2" FIP	2.50"
DEU200CF	2" Sweat	2" FIP	2.93"
DEU050C-075F	1/2" Sweat	3/4" FIP	1.89"