


Male x Sweat Dielectric Union

Lead Free

FEATURES

- **CH8A Steel** – Allows for a high-pressure tolerance of 500 PSI and a maximum temperature of 180°F.
- **Built-in EPDM Gasket** - Makes the connector more resistant to abrasion and harsh chemicals.
- **Plastic PA66+30%GF** – Made with a durable glass-fiber reinforced plastic for outstanding strength and rigidity.
- **Galvanized Steel-Plated** – keeps the union resistant to corrosion and rust.

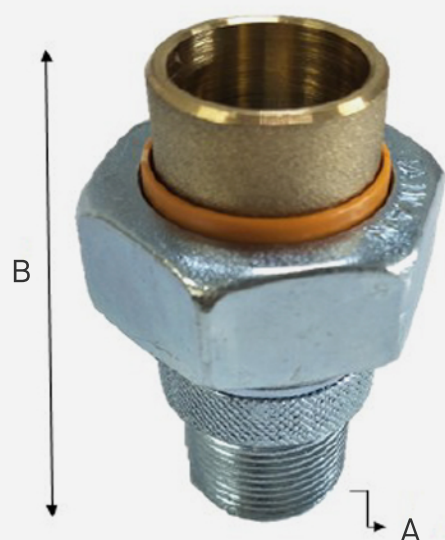

SKU	A	B
DEU050CM	1/2" MIP	2.76"
DEU075CM	3/4" MIP	2.97"