


Sweat Isolator Flange

FEATURES

- **Forged Brass Body** – enhances the 3/4" Sweat Isolator Flange's durability and longevity.
- **Durable** - Equipped with a built-in packing gland, O-ring stem seal, and blowout-proof brass stem for a secure, long-lasting seal.
- **Maximum Endured Pressure** - 600 psi (non-shock WOG).
- **Fully-Compliant** - Meets ANSI B1.20.1 standards for threaded piping.

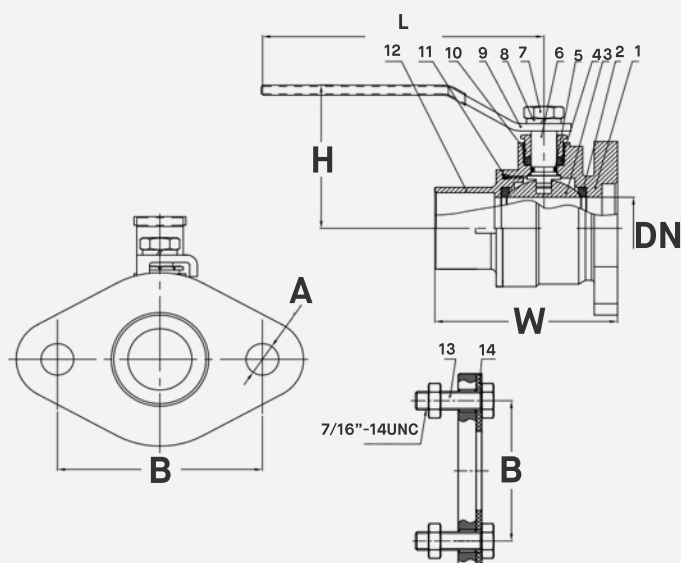

Number	Part	Material
1	Body	Brass
2	Seat	PTFE
3	Ball	Brass/Chrome Plated
4	Packing	PTFE
5	O-Ring	NBR
6	Stem	Brass
7	Handle Nut	Plated Steel
8	Lock Washer	Plated Steel
9	Handle	Plated Steel
10	Packing Nut	Brass
11	O-Ring	Viton
12	Cap	Brass
13	Rubber Washer	EPDM
14	Bolt	Plated Steel

SKU	Size	DN	W	H	L	A	B
IFS050	1/2"	0.59"	1.99"	1.81"	3.46"	0.50"	3.12"
IFS075	3/4"	0.75"	2.42"	2.09"	4.29"	0.50"	3.12"
IFS100	1"	0.98"	2.78"	2.25"	4.29"	0.50"	3.12"
IFS125	1-1/4"	1.26"	3.30"	2.53"	5.63"	0.50"	3.12"
IFS150	1-1/2"	1.57"	3.75"	2.74"	5.63"	0.50"	3.50"
IFS200	2"	1.94"	5.41"	3.04"	5.63"	0.50"	3.50"