


Push Fit In-Line Check Valve

Lead Free

FEATURES

- Available for Copper, CPVC, or PEX pipe
- Brass Alloy: C46500
- Max pressure: 200 PSI
- Max temperature: 200 F
- Service: Water
- Comply with ASME A112.18.1, CSA B125.1, ASSE1061
- Certification: cUPC, NSF/ANSI 61 approved

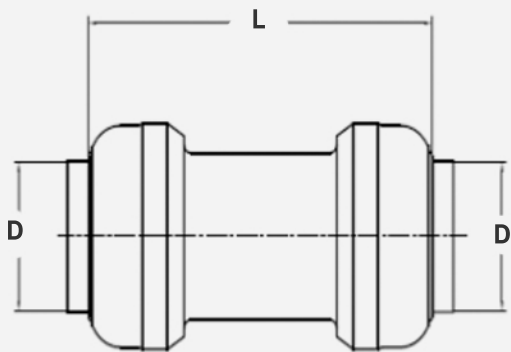

SKU	L	D
PFCV050	2.34"	1/2" PUSH
PFCV075	3.01"	3/4" PUSH