


Push Fit x Female Adapter

SPECIFICATION

- Lead Free
- **2 step installation:** Cut and Push
- **Material:** Brass Alloy C46500
- **Max working temperature:** 200oF (90oC)
- **Max working pressure:** 150psi (10bar)
- **Max resistant pressure:** 350psi (25bar)
- **Max endured pressure:** 600psi (40bar)
- **Suitable for different kinds of piping system:** Copper, PEX, CPVC

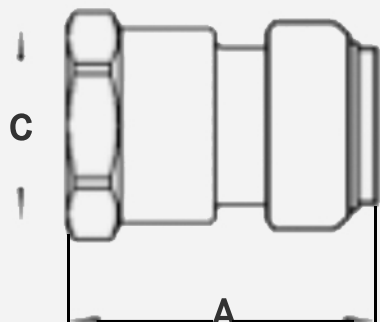

SKU	A	B	C
PFF050	1.614"	1/2"	1/2" NPT
PFF075	1.811"	3/4"	3/4" NPT