


Push Fit x Female Adapter

FEATURES

- Lead Free
- **Two step installation:** Cut and Push
- **Material:** Brass Alloy C46500
- **Max working temperature:** 200°F (90°C)
- **Max working pressure:** 150 psi (10bar)
- **Max resistant pressure:** 350 psi (25bar)
- **Max endured pressure:** 600psi (40bar)
- Suitable for different kinds of piping system including Copper, PEX, and CPVC.

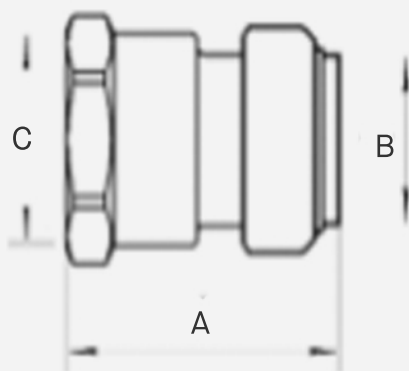

SKU	A	B	C
PFF100	1.969"	1"	1"