

Push Fit x FNPT 90° Elbow


(Lead Free)

FEATURES

- **Easy to Install** – The 2-step cut-and-push installation process allows for fast installation without tools, glue, or soldering.
- **Durable** – Able to withstand a maximum working temperature of 200°F (90°C) at the following pressure ranges:
 - Maximum working pressure: 150psi (10bar)
 - Maximum resistant pressure: 350psi (25bar)
 - Maximum endured pressure: 600psi (40bar)
- **Versatile** - Compatible with copper, PEX, and CPVC piping systems.
- **Lead Free Brass Construction** - Made from certified lead-free brass for safe and effective use in hydronics and potable water systems.



PLEASE NOTE: THIS PRODUCT IS SUSCEPTIBLE TO DEZINCIFICATION AND DOES NOT HOLD A HIGH DZR RATING. THIS PRODUCT SHOULD NOT BE USED IN APPLICATIONS WHERE BRASS PARTS MAY BE EXPOSED TO HARD WATER WITH HIGH SULFUR OR MINERAL CONTENT.

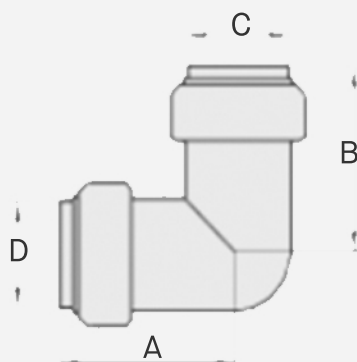

SKU	A	B	C	D
PFFE050	1.26"	1.26"	1/2"	1/2"