

Push Fit x Male Adapter

FEATURES


Easy to Install – The 2-step cut-and-push installation process allows for fast installation without tools, glue, or soldering.

Durable – Able to withstand a maximum working temperature of 200°F (90°F) at the following pressure ranges:


- Maximum working pressure: 150psi (10bar)
- Maximum resistant pressure: 350psi (25bar)
- Maximum endured pressure: 600psi (40bar)

Versatile - Compatible with copper, PEX, and CPVC piping systems.

Lead Free - Made from certified lead-free brass for safe and effective use in hydronics and potable water systems.

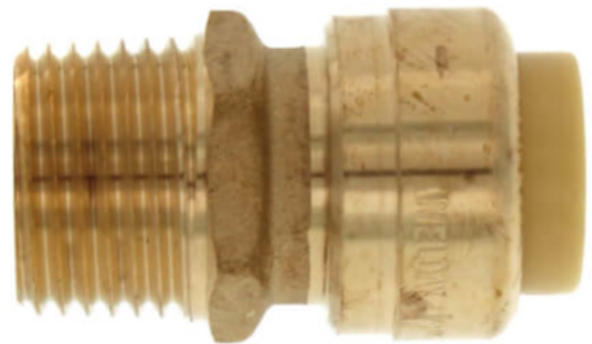

Please note: This product is susceptible to dezincification and does not hold a high DZR rating. This product should not be used in applications where brass parts may be exposed to hard water with high sulfur or mineral content.

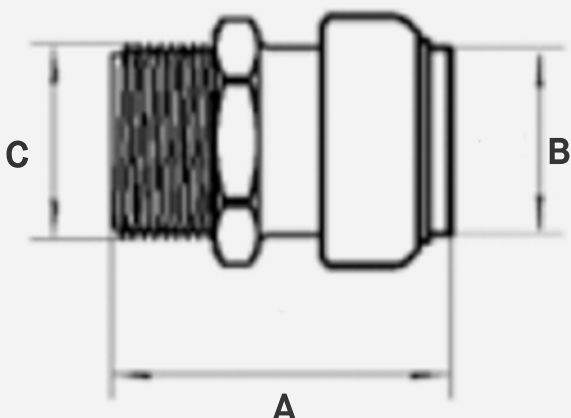

SKU	A	B	C
PFM050	1.614	1/2"	1/2"
PFM075	1.890	3/4"	3/4"
PFM100	2.008	1"	1"