

# Push Fit x MNPT 90° Elbow (Lead Free)


Please Note:

This product is susceptible to dezincification and does not hold a high DZR rating. This product should not be used in applications where brass parts may be exposed to hard water (high sulfur or mineral content).



## FEATURES

- Fast installation solution
- No glue, no soldering, no tooling
- 2 step installation: cut and push
- Max working temperature: 200°F (90°C)
- Max working pressure: 150psi (10bar)
- Max resistant pressure: 350psi (25bar)
- Max endured pressure: 600psi (40bar)
- Certified for potable water and hydronics
- Suitable for different kinds of piping system: Copper, PEX, and CPVCd

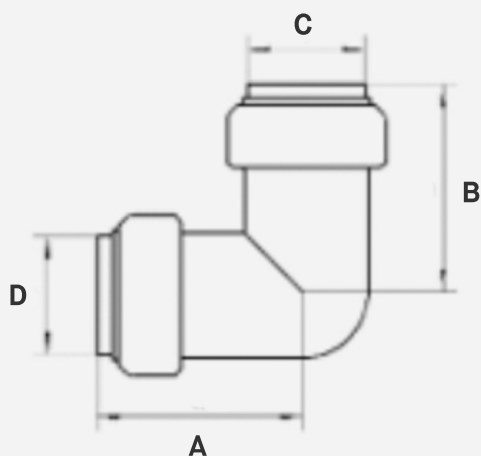

SKU	A	B	C	D
PFME050	1.26	1.26	1/2"	1/2"
PFME075	1.57	1.57	3/4"	3/4"