

# 3/4" x 3/4" x 1/2" Push Fit Reducing Tee (Lead Free)

## FEATURES

**Easy to install** -The 2-step cut-and-push installation process allows for fast installation without tools, glue, or soldering.

**Durable** – Able to withstand a maximum working temperature of 200°F (90°F) at the following pressure ranges:

- Maximum working pressure: 200 PS
- Max working pressure: 150psi (10bar)
- Max resistant pressure: 350psi (25bar)
- Max endured pressure: 600psi (40bar)


**Versatile** - Compatible with copper, PEX, and CPVC piping systems.

Certified for potable water and hydronics

**Lead Free** - Made from certified lead-free brass for safe and effective use in hydronics and potable water systems.

Please Note: This product is susceptible to dezincification and does not hold a high DZR rating.

This product should not be used in applications where brass parts may be exposed to hard water (high sulfur or mineral content).

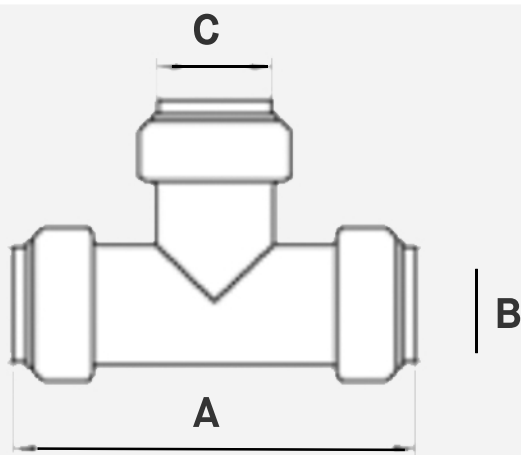

SKU	A	B	C	D
PFT075-075-050	2.99"	3/4"	1/2"	3/4"