

Expansion PEX x Female Sweat Copper Pipe Adapter


Lead Free Brass

FEATURES

- For use with PEX-A tubing
- Manufactured to ASTM Standard F876-877
- Pressure/Temperature Rating: 250 psi/ 180°F
- Material: C46500 (Lead Free Brass)
- NSF/ANSI Standard 14
- NSF/ANSI Standard 61
- NSF/ANSI Standard 372 (Low Lead)
- SE Certified
- CSA B137.5



SKU: PPCA050, PPCA075, PPCA100,
PPCA125, PPCA150, PPCA050-075

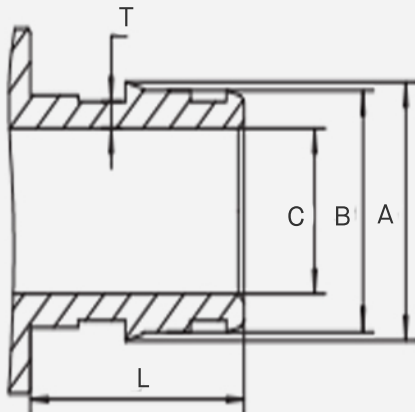

Insert for Fittings Size					
Size	A	B	C	L	T
3/8"	0.476"	0.437"	0.26"	0.591"	0.047"
1/2"	0.614"	0.575"	0.378"	0.709"	0.057"
5/8"	0.744"	0.693"	0.50"	0.866"	0.057"
3/4"	0.87"	0.791"	0.595"	0.945"	0.057"
1"	1.106"	1.028"	0.795"	1.181"	0.072"
1-1/4"	1.357"	1.271"	0.96"	1.445"	0.075"
1-1/2"	1.49"	1.378"	1.084"	1.704"	0.095"
2"	2.075"	1.954"	1.55"	2.147"	0.095"