

Expansion PEX x NPT Female Adapter


Lead Free Brass

FEATURES

- For use with PEX-A tubing
- Manufactured to ASTM Standard F876-877
- Pressure/Temperature Rating: 250 psi/ 180°F
- Material: C46500 (Lead Free Brass)
- NSF/ANSI Standard 14
- NSF/ANSI Standard 61
- NSF/ANSI Standard 372 (Low Lead)
- SE Certified
- CSA B137.5



SKU: PPF050, PPF075, PPF100,
PPF125, PPF150, PPF050-075

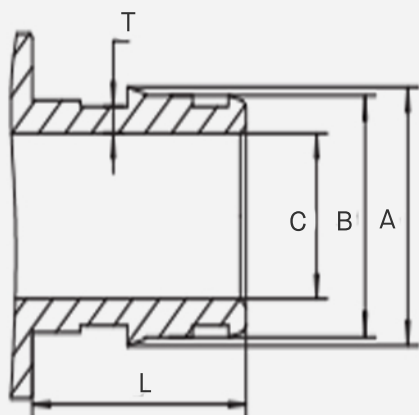

| Insert for Fittings Size | | | | | |
|--------------------------|--------|--------|--------|--------|--------|
| Size | A | B | C | L | T |
| 3/8" | 0.476" | 0.437" | 0.26" | 0.591" | 0.047" |
| 1/2" | 0.614" | 0.575" | 0.378" | 0.709" | 0.057" |
| 5/8" | 0.744" | 0.693" | 0.50" | 0.866" | 0.057" |
| 3/4" | 0.87" | 0.791" | 0.595" | 0.945" | 0.057" |
| 1" | 1.106" | 1.028" | 0.795" | 1.181" | 0.072" |
| 1-1/4" | 1.357" | 1.271" | 0.96" | 1.445" | 0.075" |
| 1-1/2" | 1.49" | 1.378" | 1.084" | 1.704" | 0.095" |
| 2" | 2.075" | 1.954" | 1.55" | 2.147" | 0.095" |